


High precision fluxgate AC/DC current transducer for galvanically isolated measurement up to 2200 A

## Features

- 1414 A rms nominal current
- 10 V output at 2000 A with BNC connector
- Ø68 mm aperture
- 108 ppm total accuracy
- 8 ppm offset
- Status signal and LED

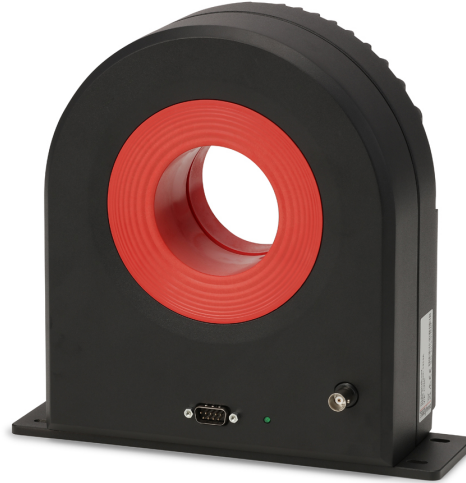

## Description

High precision DC current transducer (DCCT) measuring up to 2200 A currents and continuously measuring 2000 A currents with a linearity error less than 30 ppm.

Based on the ultra stable Danisense closed loop flux gate technology, the DL2000UB-10V has very low offset and ultra low drift.

With an integrated voltage output module (VOM) outputting 10V at 2000 A, the DL2000UB-10V makes high current measuring easy.

It provides high resolution for precise monitoring, reliable and consistent performance, and a rugged, full aluminium design for durability.

## Applications

- Electric vehicle (EV) test bench
- Power measurement and power analysis
- Particle accelerators
- MRI devices and medical scanners
- Battery testing and evaluation systems
- Current calibration purposes
- Stable power supplies
- Precision current sensing

**Electrical specifications at 23 °C**

| Parameter                                       | Symbol           | Unit      | Min                            | Typ.        | Max         | Comment                                                                           |
|-------------------------------------------------|------------------|-----------|--------------------------------|-------------|-------------|-----------------------------------------------------------------------------------|
| Nominal primary AC current                      | $I_{PN\ AC}$     | Arms      |                                |             | 1414        | Refer to Fig. 2 for derating                                                      |
| Nominal primary DC current                      | $I_{PN\ DC}$     | A         | -2000                          |             | 2000        | Refer to Fig. 2 for derating                                                      |
| Measuring range                                 | $I_{PM}$         | A         | -2200                          |             | 2200        | Refer to Fig. 2 for derating                                                      |
| Nominal secondary voltage                       | $V_O$            | V         | -10                            |             | 10          | At nominal primary DC current                                                     |
| Transfer ratio                                  | k                | A/V       | 200                            |             | 200         | $I_{primary}/V_{secondary}$                                                       |
| Output resistance                               | $R_O$            | $\Omega$  |                                | 1.2         |             | At DC                                                                             |
| Linearity error                                 | $\epsilon_L$     | ppm       | -30                            | $\pm 15$    | 30          | ppm refers to reading                                                             |
| Ratio error                                     |                  | ppm       | -100                           |             | 100         | ppm refers to reading                                                             |
| Ratio temperature coefficient                   |                  | ppm/K     | -1                             |             | 1           | ppm refers to reading                                                             |
| Ratio stability                                 |                  | ppm/month | -5                             |             | 5           | ppm refers to reading                                                             |
| Offset (including earth field)                  |                  | ppm       | -8                             |             | 8           | ppm refers to $I_{PN\ DC}$                                                        |
| Offset temperature coefficient                  |                  | ppm/K     | -0.1                           |             | 0.1         | ppm refers to $I_{PN\ DC}$                                                        |
| Offset stability over time                      |                  | ppm/month | -0.1                           |             | 0.1         | ppm refers to $I_{PN\ DC}$                                                        |
| Bandwidth                                       | $f(\pm 3dB)$     | kHz       |                                | 300         |             | Small signal. See Fig. 3                                                          |
| Response time to a step current $I_{PN}$        | $t_r$            | $\mu s$   |                                | 1           |             | To 90% of step current                                                            |
| Total accuracy without offset                   | $\epsilon_{tot}$ |           | % of reading + % of full scale |             |             | Full scale refers to $I_{PN\ DC}$ .                                               |
| <10 Hz                                          |                  |           | 0.01 + 0.00001                 |             |             | For details, see <a href="#">Linear interpolation of accuracy specification</a> . |
| <100 Hz                                         |                  |           | 0.01 + 0.00001                 |             |             |                                                                                   |
| <1 kHz                                          |                  |           | 0.5 + 0.00001                  |             |             |                                                                                   |
| <10 kHz                                         |                  |           | 1.5 + 0.0002                   |             |             |                                                                                   |
| <100 kHz                                        |                  |           | 5 + 0.004                      |             |             |                                                                                   |
| <300 kHz                                        |                  |           | 30 + 0.005                     |             |             |                                                                                   |
| Phase shift                                     |                  |           |                                | 0.01°       |             |                                                                                   |
| <100 Hz                                         |                  |           |                                | 0.01°       |             |                                                                                   |
| <1 kHz                                          |                  |           |                                | 0.4°        |             |                                                                                   |
| <10 kHz                                         |                  |           |                                | 4°          |             |                                                                                   |
| <100 kHz                                        |                  |           |                                | 35°         |             |                                                                                   |
| RMS noise                                       |                  | ppm rms   |                                |             | 0.02        | ppm refers to $I_{PN\ DC}$                                                        |
| <100 Hz                                         |                  |           |                                |             | 0.1         |                                                                                   |
| <1 kHz                                          |                  |           |                                |             | 1.2         |                                                                                   |
| <10 kHz                                         |                  |           |                                |             | 3.5         |                                                                                   |
| Fluxgate excitation frequency                   | $f_{exc}$        | kHz       |                                | 15.63       |             |                                                                                   |
| Power supply voltages                           |                  | V         | $\pm 14.25$                    |             | $\pm 15.75$ |                                                                                   |
| Idle current consumption                        |                  | mA        |                                | $\pm 180$   |             | Primary current = 0 A                                                             |
| Current consumption at nominal current          |                  | A         | -1.52                          |             | 1.52        | At $I_{PN\ DC}$                                                                   |
| Current consumption at max current              |                  | A         | -1.65                          |             | 1.65        | At $I_{PM}$                                                                       |
| Offset change with external magnetic field      |                  | ppm/mT    | -1                             | $\pm 0.4$   | 1           | ppm refers to nominal current                                                     |
| Offset change with power supply voltage changes |                  | ppm/V     | -0.02                          | $\pm 0.006$ | 0.02        | ppm refers to nominal current                                                     |

## Linearity error

Linearity error is defined as the deviation from a straight line. The straight line is a linear regression trend line based on the least squares method of the measurement points from 0 to positive max current and another trendline is calculated from 0 to negative max current. The difference between each measured point and the linear trend line is the linearity error. The linearity error  $\epsilon_L$  can be expressed as (1), where  $I_{\text{reading}}$  is the measurement result and  $I_{\text{fitted}}$  is the regression value.

$$\epsilon_L = I_{\text{reading}} - I_{\text{fitted}} \quad (1)$$

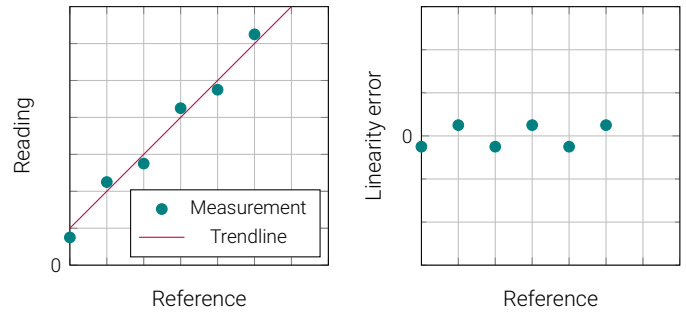


Figure 1: Linearity error definition

## Reading and full scale

Reading is the actual value measured at a given time. Full scale is the rated nominal value of the device. If a given current  $I_{\text{reading}}$  is measured, the total accuracy is calculated as (2). Example: A 500 A rated device has a specification of 0.005% + 0.0015% (reading + full scale) at < 10 Hz, plus an offset of 0.001 % (of full scale). The device is measuring (reading) 10 A dc, and the accuracy is calculated as (3).

$$\epsilon_{\text{tot}} = \epsilon_{\text{reading}} \cdot I_{\text{reading}} + (\epsilon_{\text{fullscale}} + \epsilon_{\text{offset}}) \cdot I_{\text{PNDC}} \quad (2)$$

$$\epsilon_{\text{tot}} = 0.005\% \cdot 10\text{A} + (0.0015\% + 0.001\%) \cdot 500\text{A} = 13\text{mA} \quad (3)$$

## Primary and secondary current/voltage

The secondary current  $I_S$  or voltage  $V_S$  is calculated by using the transfer ratio  $k$ , as in (4).

$$I_S = \frac{I_P}{k}, \quad V_S = \frac{V_P}{k} \quad (4)$$

## Converting from ppm of nominal to secondary current/voltage

The nominal primary current is the rated current for the device. If  $\epsilon_{\text{ppm}}$  is the error in ppm referred to nominal, use (5) to convert to ampere primary current. If the primary/secondary transfer ratio is  $k$ , use (6) to convert to ampere secondary current. If the device has voltage output, use (7)

$$\epsilon_{\text{Pampere}} = \epsilon_{\text{ppm}} \cdot I_{\text{PNDC}} \cdot 1 \times 10^{-6} \quad (5)$$

$$\epsilon_{\text{Sampere}} = \epsilon_{\text{ppm}} \cdot \frac{I_{\text{PNDC}}}{k} \cdot 1 \times 10^{-6} \quad (6)$$

$$\epsilon_{\text{Svolt}} = \epsilon_{\text{ppm}} \cdot \frac{V_{\text{PNDC}}}{k} \cdot 1 \times 10^{-6} \quad (7)$$

## Linear interpolation of accuracy specification

If the accuracy at a specific frequency is required, it is possible to use linear interpolation between known points. If the frequency  $f$  is  $f_1 < f < f_2$  and the accuracy at the frequency  $\epsilon(f)$  is  $\epsilon(f_1) < \epsilon(f) < \epsilon(f_2)$ , then the accuracy at  $f$  is found as (8).

$$\epsilon(f) = \frac{\epsilon(f_2) - \epsilon(f_1)}{f_2 - f_1} (f - f_1) + \epsilon(f_1) \quad (8)$$

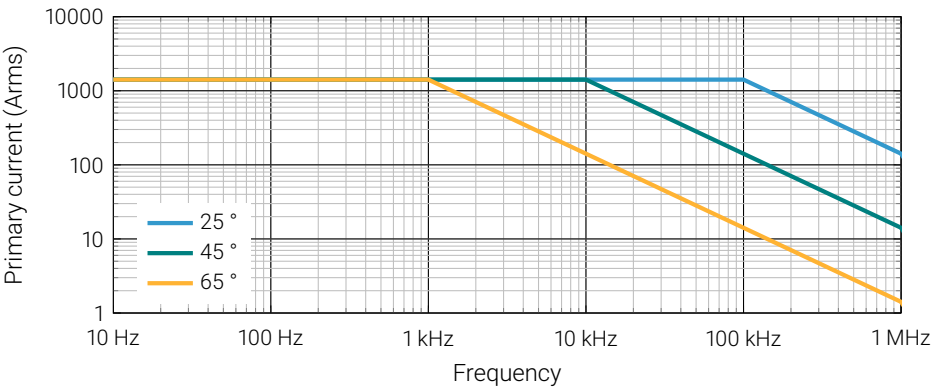


Figure 2: Maximum continuous primary current vs. frequency

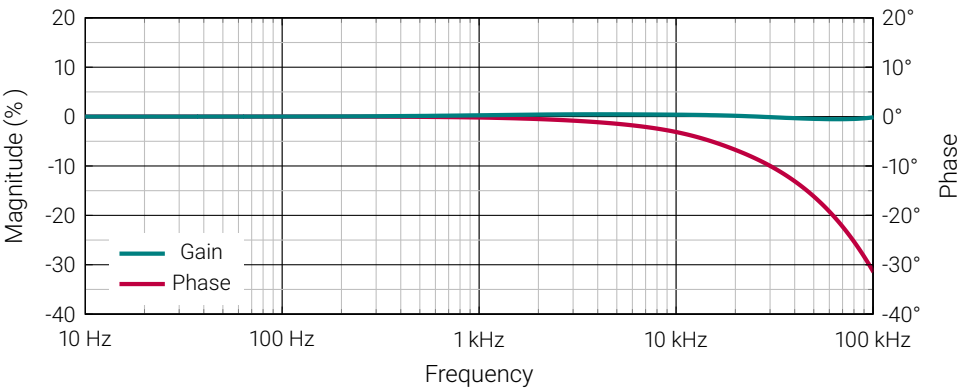


Figure 3: Frequency characteristics

## Isolation specifications according to IEC 61010-1



When using *REINFORCED insulated* wire, all wiring must be insulated for the highest voltage used. When using *BASIC insulated* or *uninsulated* wire, follow the specified voltages in the table below:

| Parameter                                                 | Unit | Value |
|-----------------------------------------------------------|------|-------|
| Clearance                                                 | mm   | 22    |
| Creepage distance                                         | mm   | 22    |
| Comparative tracking index (CTI)                          | V    | > 600 |
| Continuous working voltage according to IEC 61010-1 with: |      |       |
| Uninsulated wire:                                         |      |       |
| Non mains                                                 |      | 2000  |
| CAT II (dc and rms)                                       |      | 1000  |
| CAT III (dc and rms)                                      |      | 1000  |
| BASIC insulated wire:                                     |      |       |
| Non mains                                                 | V    | 4000  |
| CAT II (dc and rms)                                       |      | 1000  |
| CAT III (dc and rms)                                      |      | 1000  |
| Transient voltage according to IEC 61010-1 with:          |      |       |
| Uninsulated wire:                                         |      |       |
| Non mains                                                 |      | 7500  |
| CAT II                                                    |      | 9500  |
| CAT III                                                   |      | 12500 |
| BASIC insulated wire:                                     |      |       |
| Non mains                                                 | V    | 11000 |
| CAT II                                                    |      | 6000  |
| CAT III                                                   |      | 8000  |



Do not connect the transducer to signals or use for measurements within Measurement Category IV, or for measurements on MAINS circuits or on circuits derived from Overvoltage Category IV which may have transient overvoltages above what the product can withstand. The product must not be connected to circuits that have a maximum voltage above the continuous working voltage, relative to earth or to other channels, or this could damage and defeat the insulation.

## Environmental and mechanical characteristics

| Parameter                   | Unit | Min | Typ | Max  | Comment                 |
|-----------------------------|------|-----|-----|------|-------------------------|
| Altitude                    | m    |     |     | 2000 | Designed for indoor use |
| Usage                       |      |     |     |      |                         |
| Pollution degree            |      |     |     | 2    |                         |
| Operating temperature range | °C   | -40 |     | 65   | Non-condensing          |
| Storage temperature range   | °C   | -40 |     | 65   |                         |
| Relative humidity           | %    | 20  |     | 80   |                         |
| Ingress protection rating   |      |     |     | IP20 |                         |
| Mass                        | kg   |     | 5.7 |      |                         |

Connections: D-sub-9 power supply and BNC voltage reading

EMC: EN 61326-1:2013-2021

Safety: IEC 61010-2-030:2021/A11:2021 and IEC 61010-1:2010/A1:2019

|                   |                                                                                                                                                                                                                                                                                           |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| External devices: | External devices connected to current transducers must comply with the standards IEC61010-1 and IEC62368-1 and be energy-limited circuitry                                                                                                                                                |
| Cleaning:         | The transducer should only be cleaned with a damp cloth. No detergent or chemicals should be used.                                                                                                                                                                                        |
| Temperature:      | When multiple primary turns are used or high primary currents are applied the temperature around the transducer will increase, please monitor to ensure that the maximum ratings are not exceeded. It is recommended to have minimum 1 mm <sup>2</sup> per ampere in the primary bus bar. |

## Intended use

The DL2000UB-10V is designed to measure current up to 2200 A, and be powered by a DSSIU-4-1U or DSSIU-6-1U or similar power supplies.

Please see the product manual: <https://danisense.com/user-manual/>

## Instruction for use



Please follow the polarity of the voltage supply to avoid damaging the device. See Fig. 5.

1. Do not power up the device before all cables are connected.
2. Place the primary conductor through the aperture of the transducer.
3. Connect a D-sub-9 cable between DSSIU-4/6-1U and each sensor.
4. Connect a voltmeter, DMM or analyzer with a voltage input to the transducer BNC connector.
5. When all connections are secured - connect mains power.
6. Apply primary current.



There is a risk of electrical shock if an uninsulated busbar with high voltages is touching the metal enclosure of the transducer. Please ensure, before powering up the system, that no uninsulated wire can touch the metal enclosure.



Do not disassemble the unit. If the green status LED is not operating with all cables connected and the system powered up, disconnect power and contact Danisense for further instruction. If the equipment is used in a manner not specified by the manufacturer, the protection provided by the equipment may be impaired.

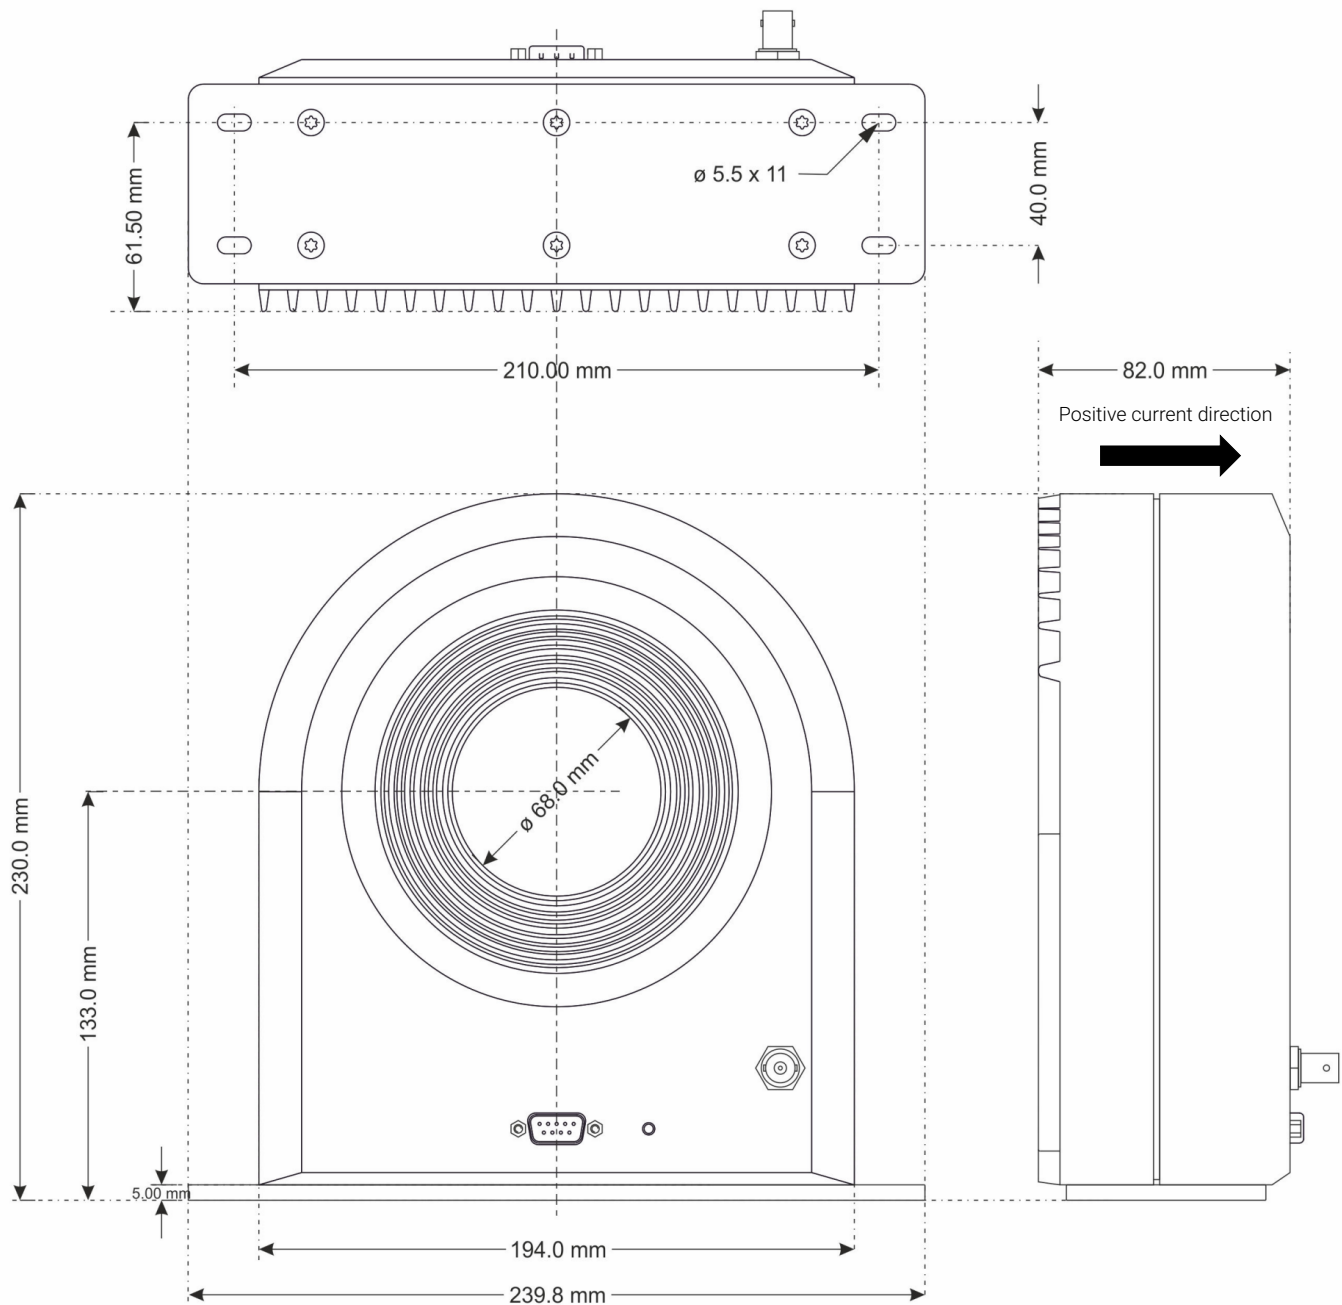


Figure 4: Dimensions of transducer. 0.3 mm Tolerance

## Mounting

|                                                 |                             |
|-------------------------------------------------|-----------------------------|
| Base plate mounting:                            | 4 x M5 slotted holes, 6 Nm  |
| Bottom direct mounting<br>(Base plate removed): | 6 x M4 threaded holes, 4 Nm |

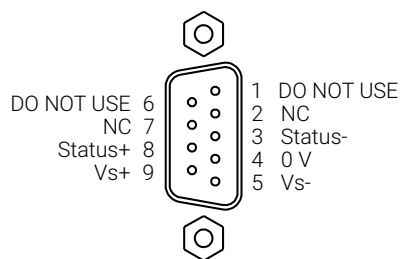


Figure 5: D-sub-9 connection pinout




Figure 6: Status signal optocoupler

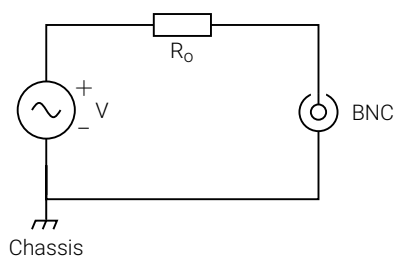


Figure 7: BNC shield and chassis connection

## Pin out description

|   |                  |                                   |
|---|------------------|-----------------------------------|
| 1 | DO NOT USE       | Must not be connected             |
| 2 | NC               | No connection                     |
| 3 | Status-          | Status signal negative terminal   |
| 4 | 0 V              | 0 V connection for supply voltage |
| 5 | V <sub>s</sub> - | Negative supply voltage           |
| 6 | DO NOT USE       | Must not be connected             |
| 7 | NC               | No connection                     |
| 8 | Status+          | Status signal positive terminal   |
| 9 | V <sub>s</sub> + | Positive supply voltage           |

## Positive current direction

Is identified by an arrow on the back side isolation plastic insert.

## Status signal and LED

When the sensor is operating in normal condition the status pins (Status+ and Status-) are shorted by an optocoupler and the green status LED is ON, see Fig. 6. When a fault is detected, or the power is off, the status pins are opened and the green status LED is OFF. Status signal optocoupler ratings found below:

|                          |                                     |
|--------------------------|-------------------------------------|
| Forward direction:       | Status+ to Status- (Pin 8 to pin 3) |
| Maximum forward current: | 10 mA                               |
| Maximum forward voltage: | 60 V                                |
| Maximum reverse voltage: | 5 V                                 |



## Declaration of Conformity

Danisense A/S  
Malervej 10  
DK-2630 Taastrup  
Denmark

Declares that under our sole responsibility that this product is in conformity with the provisions of the following EC Directives, including all amendments, and with national legislation implementing these directives:

Directive 2014/30/EU

Directive 2014/35/EU

And that the following harmonized standards have been applied

EEN 61010-1 (Third Edition):2010, EN 61010-1:2010/A1:2019

EN 61010-2-030:2021/A11:2021

EN 61326-1:2013

All DANISENSE products are manufactured in accordance with RoHS directive 2011/65/EU. Annex II of the RoHS directive was amended by directive 2015/863 in force since 2015, expanding the list of 6 restricted substances (Lead, Hexavalent Chromium, PBB, PBDE and Cadmium)

Danisense follows the provision in EN 63000:2018



Place  
Taastrup, Denmark

Henrik Elbæk

Date  
2022-03-15