

RF PULSE CURRENT MONITORING PROBE



1 Introduction

The TBPCP4-50H50 is an RF pulse current monitoring probe, expanding the Tekbox product range of affordable test equipment.

The probe has a 3 dB bandwidth from 5 Hz to 50 MHz and is characterized over the frequency range from 0.1 Hz to 100 MHz. The TBPCP4-50H50 is typically used for surge or RF pulse current monitoring applications in the time domain, in contrary to RF current monitoring probes designed for EMC applications, which are typically used for measurements in the frequency domain.



Picture 1: TBPCP4-50H50 current monitoring probe

The aperture of the RF current monitoring probe is 46 mm.

The transfer-impedance is -20 dB Ω / 0.1 V/A when terminated with 50 Ohm and 0.2 V/A with a high impedance load. The typical 3dB bandwidth is 5 Hz to 50 MHz.

RF PULSE CURRENT MONITORING PROBE

2 Specification

Characterized frequency range: 1 Hz to 100 MHz
3 dB bandwidth: 50 Hz to 50 MHz (measured in a 50 + 50 Ohm loop)
Transfer impedance into 50 Ω load: -12 dB Ω ; 0.25 V/A
Transfer impedance into high Z: 0.5 V/A
Probe port impedance: 50 Ω
Droop rate: 7 %/ms
Rise time: < 10 ns
Max. RMS AC current: 20A
Max. pulse current: 2500A
Current time product: 0.1 Ampere seconds
Max. core temperature: 80 $^{\circ}$ C
Aperture diameter: 46 mm
Outside diameter: 124 mm
Height: 37 mm
Weight: 1050 g
Connector type: N female; comes supplied with a coaxial adapter to BNC-female

3 Transfer impedance

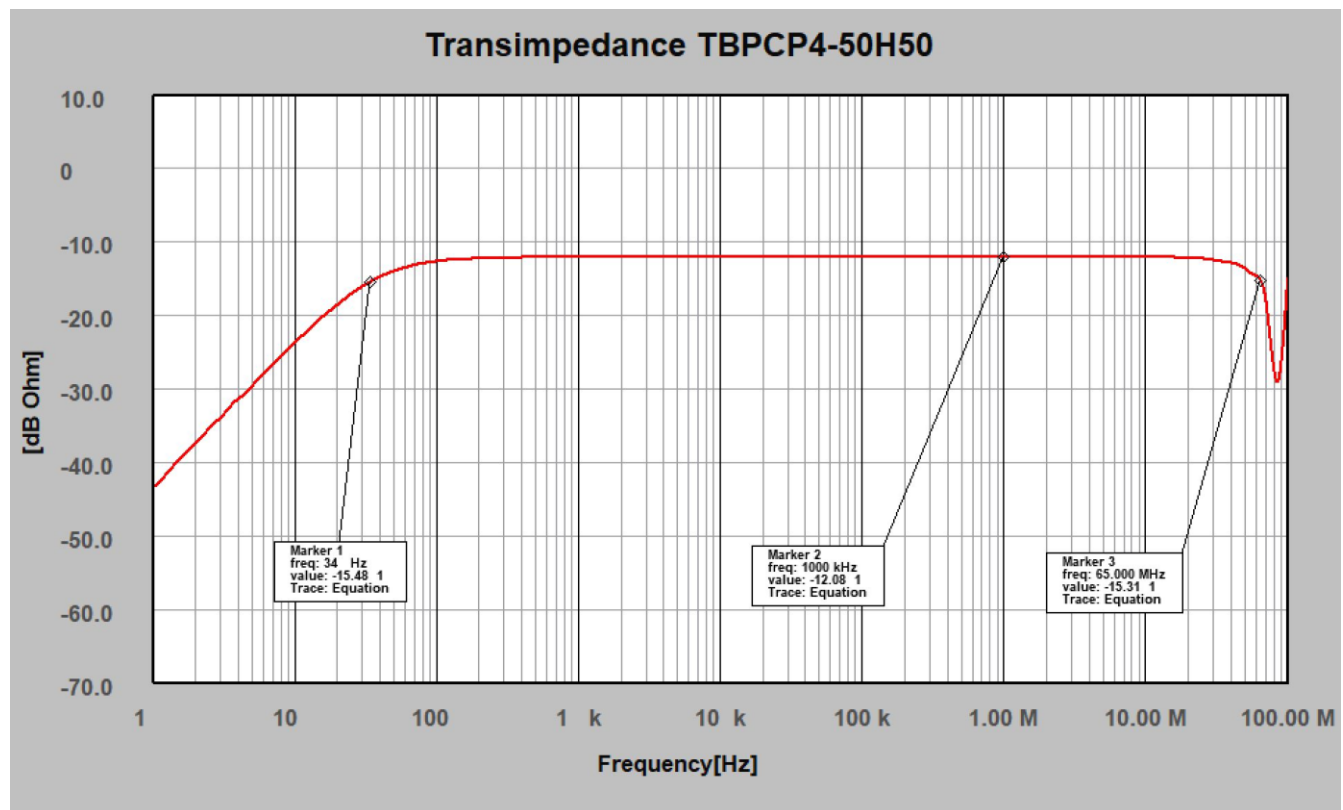


Figure1: typical transfer impedance, 1 Hz – 100 MHz

RF PULSE CURRENT MONITORING PROBE

4 Transfer impedance table

The table below shows typical transfer impedance data of a TBPCP4-50H50 pulse current probe. Each current probe is delivered with its corresponding measurement protocol. The transimpedance in dBΩ is measured with a 50 Ohm load.

Transimpedance [V/A] = $10^{(dB\Omega/20)}$ @ 50 Ohm

Transimpedance [V/A] = $2 \cdot 10^{(dB\Omega/20)}$ @ High Z

Frequency	transfer impedance [dBΩ] 50 Ohm load	transfer impedance [V/A] 50 Ohm load	transfer impedance [V/A] high Z load
1 Hz	-43,48	0,007	0,013
2,5 Hz	-35,36	0,017	0,034
5 Hz	-29,68	0,033	0,066
7,5 Hz	-26,15	0,049	0,098
10 Hz	-23,74	0,065	0,130
25 Hz	-17,13	0,139	0,278
50 Hz	-14,02	0,199	0,398
75 Hz	-13,05	0,222	0,445
100 Hz	-12,67	0,233	0,465
250 Hz	-12,25	0,24	0,49
500 Hz	-12,04	0,25	0,50
750 Hz	-12,05	0,25	0,50
1 kHz	-12,02	0,25	0,50
5 kHz	-12,01	0,25	0,50
10 kHz	-12,01	0,25	0,50
50 kHz	-12,04	0,25	0,50
100 kHz	-12,04	0,25	0,50
500 kHz	-12,05	0,25	0,50
1 MHz	-12,08	0,25	0,50
5 MHz	-12,06	0,25	0,50
10 MHz	-12,04	0,25	0,50
15 MHz	-12,09	0,25	0,50
20 MHz	-12,27	0,24	0,49
25 MHz	-12,30	0,24	0,49
30 MHz	-12,49	0,24	0,47
40 MHz	-12,89	0,23	0,45
50 MHz	-13,67	0,21	0,41
60 MHz	-14,67	0,18	0,37
65 MHz	-15,31	0,172	0,343
70 MHz	-17,80	0,129	0,258
75 MHz	-22,61	0,074	0,148
80 MHz	-27,31	0,043	0,086
85 MHz	-29,08	0,035	0,070
90 MHz	-26,75	0,046	0,092
95 MHz	-21,58	0,083	0,167
100 MHz	-14,98	0,178	0,356

Table1: Transfer impedance: 1 Hz to 100 MHz, typical data

RF PULSE CURRENT MONITORING PROBE


5 Calibration fixture

Tekbox supplies a calibrator suitable for the TBPCP4-50H50 current probe:



Picture 1: TBPCP4-CAL RF current probe calibration fixture

6 Dimensions

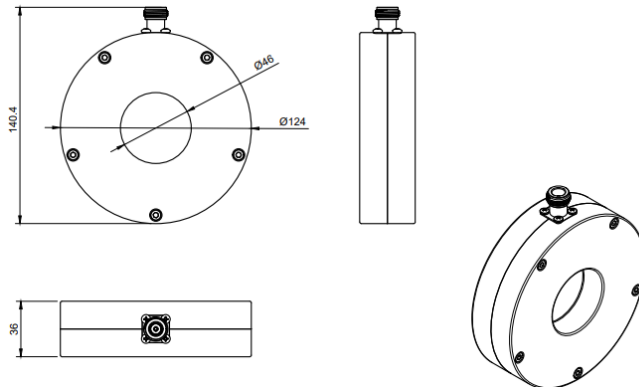

7 Ordering Information

Part Number	Description
TBPCP4-50H50	Pulse Current Probe 50Hz – 50 MHz, N-male to BNC-Female adapter
TBCP4-CAL	Calibration fixture for TBPCP3 series pulse current probes

8 History

Version	Date	Author	Changes
V 1.0	7.7.2025	Mayerhofer	Creation

TekBox Digital Solutions Vietnam Pte. Ltd.

www.tekbox.com

Factory 4, F4, Lot I-3B-1, Saigon Hi-Tech Park, Tan Phu Ward, Thu Duc, Ho Chi Minh City, Vietnam