# Micsig



# High Frequency AC/DC Current Probe CP1003/CP1003B/CP503/CP503B

- Accurate and Easy AC/DC measuring capabilities
- 6A / 30A range selection, low current measurements
- Wide bandwidth with superior 1% accuracy (typical)



#### **Product Model:**






CP1003B/CP503B

CP1003/CP503

#### **Key Features:**

- · Dual range selection, easy to measure low current
- · Degaussing and automatic Zero setting
- 1% DC accuracy, meet more measuring requirements
- Directly powered by Micsig UPI interface (CP1003/CP503)
- Standard BNC interface, suitable for all oscilloscopes (CP1003B/CP503B)

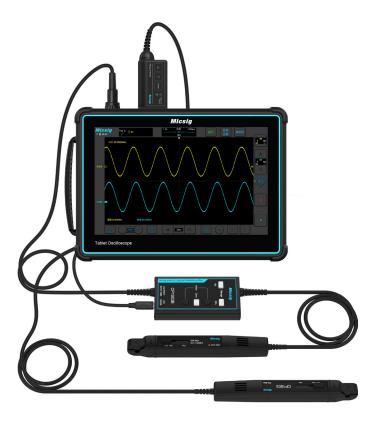

### **Applications:**

- Electric vehicle transportation design
- · Switching power supply design
- Experiment of electronic engineering
- · Semiconductor devices design
- Avionics design
- Inverter/Transformer design
- Electronic ballast design
- Industrial Control / Consumer
  Electronics design
- Engine driven design
- Power electronics and electric drive experimental design


#### **Application Performance**


**HF Current Signal** 

30A 0.1V/A

Surge Current

6A 0.5V/A

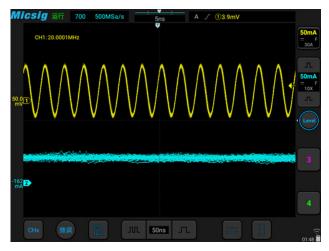



Signal is completely distorted when measured by Low frequency current probe (Blue waveform on CH2)



Surge current waveform at power adapter startup

#### **Easy Measurement**













## **Specifications**


Model	CP503	CP1003	CP503B	CP1003B
Power Interface	Micsig UPI		Standard BNC interface	
Bandwidth	50MHz	100MHz	50MHz	100MHz
Rise Time	≤ 7ns	≤ 3.5ns	≤ 7ns	≤ 3.5ns
Range	6A (2X) / 30A (10X)			
Output sensitivity	1V/2A (6A) 1V/10A (30A)			
DC accuracy (typical)	±1%±10mA (6A) ±1%±50mA (30A)			
Delay	< 6ns (6A) < 6ns (30A)		< 30ns (6A) < 30ns (30A)	
Current Range	20mA~6Apk (6A) 50mA~30Apk (30A)			
Max. Current Input	30Apk, 60Apk-pk, 21.21Arms			
Noise	≤ 1.4 mA RMS (Bandwidth at 20 MHz, Range 30A, 10X)			
Max. Working Voltage	CAT I 300V			
Max. Floating Voltage	CAT I 300V			
Max. Conductor Diameter	5mm			
Overload Indicator	Flashing light			
Power Supply	DC	12V	DC 5	V 3A

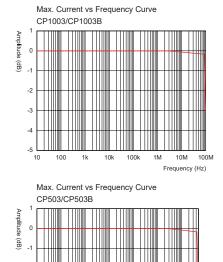









#### **Micsig**

Shenzhen Micsig Technology Co., Ltd.

10k 100k 1M

Tel: +86 755-88600880 Email: sales@micsig.com

10M 50M

Frequency (Hz)

Web: www.micsig.com Add: 1F, Huafeng International Robot Industrial Park, Hangcheng Rd, Bao'an District, Shenzhen, Guangdong, China

<sup>\*</sup>Micsig reserves the right of final interpretation for the content hereinabove;

<sup>\*</sup>It is subject to update without prior notice.