

Automotive Tablet Oscilloscope ATO Series DATASHEET

- 2 or 4 analog channels
- Max. 300MHz bandwidth
- Max. 2GSa/s sampling rate
- Up to 220Mpts memory depth
- 7500mAh large Li-ion battery
- Support electronic measurements for all vehicles



PRODUCT OVERVIEW

ATO series oscilloscope is an oscilloscope dedicated to automotive maintenance and diagnostics. Equipped with professional automotive diagnostic functions, it comes with 2 and 4 channels, max. 300MHz bandwidth, up to 2GSa/s sampling rate and 220Mpts memory depth, delivers most powerful signal capture and analysis capability.

With 10.1-inch high-resolution full touch screen, large built-in battery, and Micsig's dedicated SigtestUI™ multi-tasking system, the ATO automotive oscilloscope making modern automotive diagnostics much easier than ever before.



- ◆ Professional automotive diagnostic tests
- ◆ Compact portable design, best for field work
- ◆ Large battery support continual field work
- ◆ Android-based OS, 32GB internal storage
- ◆ Switchable 1MΩ/50Ω input impedance
- ◆ Deep memory to display all signal details
- ◆ Comprehensive serial bus trigger & decoding
- ◆ Support Wi-Fi, USB, PC and SCPI control
- ◆ Hardware-based filter to eliminates interferences
- ◆ Support segmented storage acquisition

Key Specifications

Model	ATO3004	ATO2004	ATO2002	ATO1004
Bandwidth	300MHz	200MHz	200MHz	100MHz
Analog Channels	4	4	2	4
Rise Time	≤1.16ns	≤1.75ns	≤1.75ns	≤3.5ns
Sampling Rate (Max.)	2GSa/S	2GSa/S	1GSa/S	1GSa/S
Memory Depth	220Mpts	220Mpts	110Mpts	110Mpts
Input Impedance	1MΩ / 50Ω		1MΩ	
Support Tests	Charging/Start Circuits, Sensors, Actuators, Ignition, Networks (CAN, CAN FD, LIN, Flexray, K line), Combination Tests, Pressure test			
Bandwidth Filter	Full bandwidth, Low pass			
Interfaces	Wi-Fi, USB 3.0/2.0 Host, USB Type-C, Grounding, HDMI, Trigger out			
Display	Industrial 10.1" TFT-LCD (1280*800)			
Dimension / Net Weight	265*192*50mm / 1.9kg (with battery)			
Battery	7.4V, 7500mAh, Li-ion battery			

CHARACTERISTICS & FEATURES

Portable Design

ABS+TPU protector, pre-installed handstrap, only 1.9kg, one hand to hold.

Robust Hardware

Upgraded core hardware, fast CPU, 32G internal storage, support video recording.

Wi-Fi

Online system update

Protocol Decoding

Standard RS-232/422/485/UART, CAN, CAN FD, LIN, SPI, I²C

Smooth Touch

10.1" integrated seamless touch screen, ultra-high 1280*800 resolution.

Friendly UI

Fast Android OS experience, updated UI design, easy to use

Auto-diagnostic Presets

Dedicated software for auto repair engineers, covering most of the auto repair tests.




Auto-diagnostic Presets:



- **Charging/Start Circuit:** 12V&24V charging, Alternator AC Ripple, Ford smart Alternator, 12V&24V Start, Cranking Current
- **Sensor:** ABS, Accelerator Pedal, Air Flow Meter, Camshaft, Coolant Temperature, Crankshaft, Distributor, Fuel pressure, Knock, Lamda, MAP, Road Speed, Throttle Position
- **Actuators:** Carbon Canister Solenoid Valve, Diesel Glow Plugs, EGR Solenoid Valve, Fuel Pump, Idle Speed Control Valve (IAC), Injector (Petrol), Injector (Diesel), Pressure Regulator, Quantity Control Valve, Throttle Servomotor, Variable-speed cooling fan, Variable Valve Timing
- **Ignition:** Primary, Secondary, Primary + Secondary
- **Networks:** CAN High & CAN Low, CAN FD, FlexRay, K line
- **Combination Tests:** Crankshaft + Camshaft, Camshaft + Primary Ignition, Primary ignition + Injector Vol, Crankshaft + Camshaft + Injector Vol. + Secondary Ignition
- **Pressure Tests:** Intake Manifold, Exhaust Tailpipe, In-Cylinder, In-Crankcase



- Built-in large Li-ion battery, work where you work

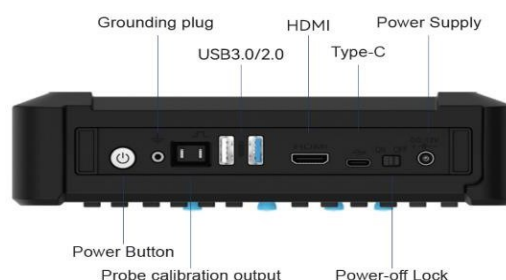

- Complete connectivity (*switch Power-off lock to ON for first-time use)

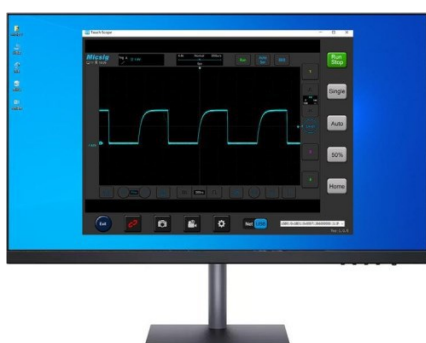

- The ATO series supports PC software + Mobile App (Android / iOS) remote control via Wi-Fi, USB to access internet for online upgrade, it also can be projected through HDMI port for demonstrations for training and education purpose.


AUTOMOTIVE DIAGNOSTIC PRESETS



▲ Support 12/24V Charging & Start circuit, AC Ripple, Cranking Current tests



▲ Directly measure the waveform of various Sensors, by comparing with standard waveform, helps user easily find out possible problem.

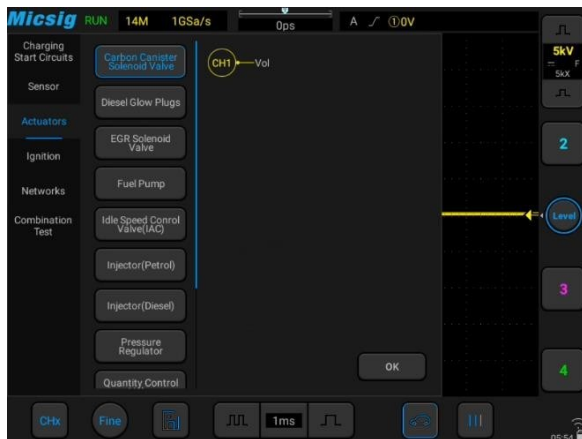

▲ Support multiple Actuator tests, including Carbon Canister & EGR solenoid valve, Fuel Pump Injectors, Cooling fan, Pressure Regulator, etc.




▲ The ignition system of a car is usually composed of primary and secondary coils and spark plugs. Can test both Primary and Secondary ignition signals, to find out possible malfunction.



▲ SATO is capable of acquiring and decoding CAN High /CAN Low, CAN FD, LIN, FlexRay, and K line signals, delivers professional Network communication tests on vehicles.




▲ The electronic faults can be complicated, by comparing the collected various waveforms, users judge faults by analyzing the timing and quantitative relationships between waveforms.

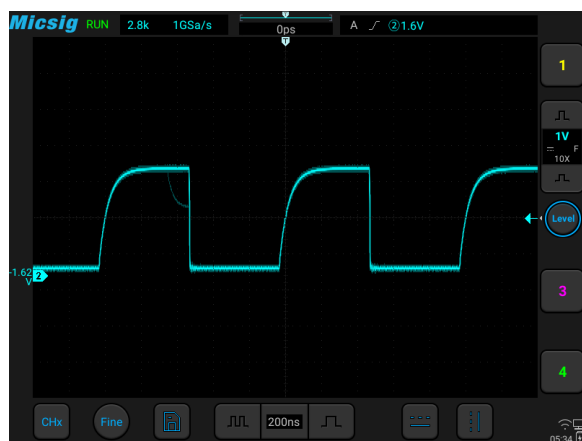

▲ High Waveform Update Rate

With a waveform update rate of up to 300,000 wfm/s, the ATO can easily capture unusual or low probability events.

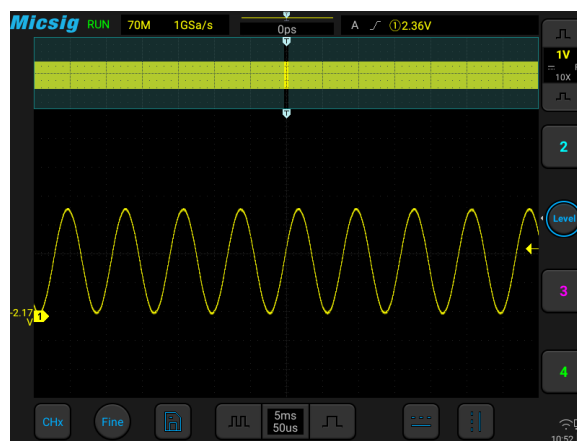


▲ Ultra-deep Memory

Using hardware-based Zoom technique and memory depth of up to 220Mpts, users to move and browse waveforms much easier and quickly zoom in to focus on the area of interest.




▲ Powerful Trigger Functions

Support Edge, Pulse, Logic, N Edge, Runt, Slope, Timeout, Video and Serial trigger, most intuitive trigger settings.

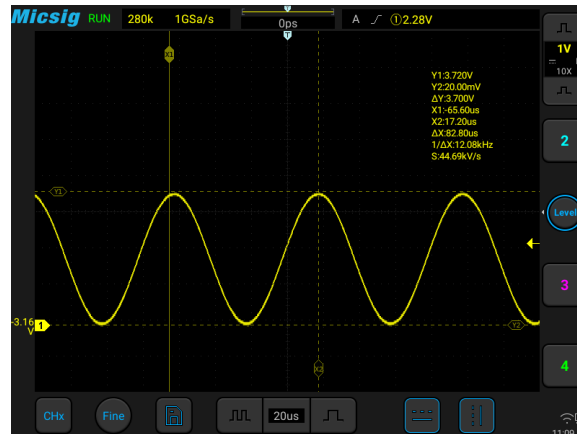


▲ Convenient Cursor Measurement

One touch to open horizontal and vertical cursors, each cursor can be moved separately or simultaneously.

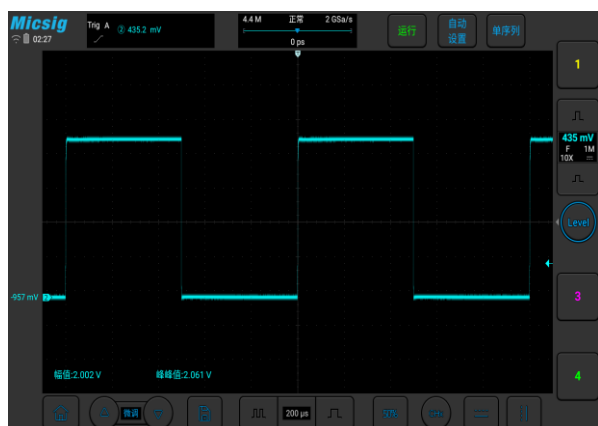

▲ Vertical scale fining

By pinching two fingers apart on the screen, you can adjust the vertical scale as you like, no longer limited by the 1/2/5 step limit.

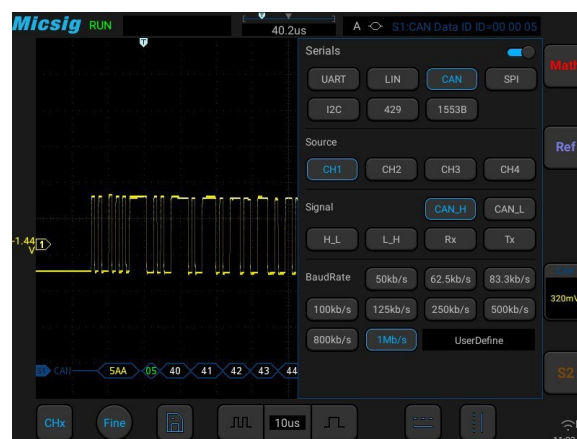

▲ Serial Bus Decoding and Analysis

Support RS-232/422/485/UART, LIN, CAN, CAN FD, I²C, SPI serial bus decoding and triggering options, display waveform and data at the same time.

Specifications

Vertical System		
Input Coupling	DC, AC, GND	
Bandwidth Filter	ATO3004 / ATO2004: Full bandwidth, Low pass (to 30Hz) ATO2002 / ATO1004: Full bandwidth, Low pass (to 30KHz)	
Input Impedance	ATO3004 / TO2004: 1MΩ±1% 50Ω±1% ATO2002 / ATO1004: 1MΩ±1%	
Vertical Resolution	8 bits	
Vertical Divisions	10 divisions	
Input Sensitivity Range	ATO3004 / ATO2004: 1mV/div~10V/div（1MΩ）1mV/div~1V/div（50Ω） ATO2002 / ATO1004: 1mV/div~10V/div（1MΩ）	
DC Gain Accuracy	5mV/div ~10V/div: ≤ ±2.0%; ≤ 2mV/div: ≤ ±3.0%	
Ch-to-Ch Isolation DC to Max. Bandwidth	>40dB（≤100MHz），>35dB（>100MHz）	
Offset Range（1MΩ, 50Ω）	±2.5V (Probe @ X1, <500mV/div), ±120V (Probe @ X1, ≥500mV/div)	
Maximum Input Voltage	CAT I 300Vrms 400Vpk（1MΩ），5Vrms（50Ω）	
Horizontal System		
Time Base	1ns/div~1ks/div（ATO2002 / ATO1004: 2ns/div-1ks/div）	
Vertical Divisions	11 divisions	
Clock Drift	≤±5ppm / year	
Time Base Accuracy	±20ppm	
Sampling System	ATO3004 / ATO2004	ATO2002 / ATO1004
Real-Time Sampling Rate	2G Sa/s (One CH), 1G Sa/s (All CH)	1G Sa/s (One CH), 250M Sa/s (All CH)
Max. Memory depth	220Mpts	110Mpts
Segmented Storage	Support	Not Support
Average	Selectable within 2, 4, 8, 16, 32, 64, 128, 256	
Envelope	Selectable within 2, 4, 8, 16, 32, 64, 128, 256, ∞	
Trigger System		
Trigger Mode	Auto, Normal, Single	
Trigger Coupling (frequency)	DC, AC (70Hz), high frequency (40KHz), low frequency (40KHz), noise (10MHz)	
Trigger Holdoff Range	200ns~10s	
Trigger Types	Edge, Pulse Width, Logic, N Edge, Runt Pulse (Runt), Slope, Time Out, Video	
Bus decoding	RS-232/422/485/UART,CAN,CAN FD,LIN,SPI,I2C	

Waveform Measurements	
Cursors	Horizontal, Vertical, Cross
Automated Measurements	31 types. Including: Period, Frequency, Rise Time, Fall Time, Delay, Positive Duty Cycle, Negative Duty Cycle, Positive Pulse Width, Negative Pulse Width, Burst Width, Positive Overshoot, Negative Overshoot, Phase, Peak-to-Peak, Amplitude, High, Low, Maximum, Minimum, RMS, Cycle RMS, Mean, Cycle Mean
Hardware Frequency Meter & Resolution	6 digits, 2Hz~Max bandwidth, PK-PK>0.8div
Waveform Math	
Dual Waveform	+, -, *, /, analog channel
FFT	Points: max. 275KdBVrms; Source: Analog channel; Resolution: Max 100Kpts Window: Rectangular, Hamming, Blackman, Hanning
AX+B	A: $\pm 1k$, Min. Resolution 1p or 4it B: $\pm 1k$, Resolution 1p or 5bit X: Analog channel
Advance math	Advanced input, including +, -, *, /, <, >, \leq , \geq , ==, !=, &&, , (,), !(), sqrt, abs, deg, rad, exp, diff, ln, sin, cos, tan, intg, lg, asin, acos, atan,
Display System	
Display Type	10.1-inch TFT LCD capacitive, 11*10 divisions
Display Resolution	1280*800 pixels
Persistence Duration	Auto, 10ms~10s, ∞
Time Base Mode	YT, XY, Zoom, Roll (scroll waveforms right to left across the screen at sweep speeds slower than or equal to 200 ms/div)
Expand Benchmark	Center, Trigger position
Waveform Display	Vectors, Line, brightness adjustable
Waveform Update Rate	ATO3004/2004/3002 is 300,000 wfms/s, ATO2002 / ATO1004 is 78,000 wfms/s
Clock	Real time, user adjustable
Language	English, Chinese, German, French, Czech, Korean, Spanish, Italian, Russia, etc.
Storage	
Storage Medium	Local, USB drive
Internal Storage	32G
Waveform Storage Format	csv, wav, bin
Store Waveform Quantity	Unlimited
Stored Waveform Rename	Support
Reference Waveform Display	4 internal waveforms
Quick Screenshot	Support
User Setting Storage	10 internal setups
User Settings Rename	Support
USB Flash Drive	Support industry standard flash drives
Input / Output Ports	
USB3.0 Port	Support one USB mass storage device, read and edit
USB2.0 Port	One, read and edit
USB Type-C	One, read and edit
DC Port	One
Probe Compensator	1KHz, 2Vpk-pk
Other supported	Wi-Fi (2.4G); HDMI 1.4; Android / IOS App, PC Remote Control

Power Source	
Power Voltage Range	100~240VAC, 50/60Hz
Power Consumption	< 60W
Adapter Output	12V DC, 5A (ATO2002 / ATO1004 is 12V DC, 4A)
Battery	7.4V, 7500mAh Li-ion battery

Environment	
Temperature	
Operating	0°C ~ 45°C
Non-operating	-40°C ~ 60°C
Humidity	
Operating	5% ~ 85%, 25°C
Non-operating	5% ~ 90%, 25°C
Altitude	
Operating	< 3000m
Non-operating	< 12000m

Physical Characteristics	
Dimensions (W x H x D)	265*192*50mm
Weight	Net: 1.9kg (with battery), Volume Weight: 4.5kg

Standard Accessories	
Accessories	<ul style="list-style-type: none"> ✧ Passive BNC probes * 2 ✧ Power adaptor * 1 pc ✧ Power plug (Local) * 1 pc ✧ Battery (Built-in) * 1 pc ✧ 8" Screen protector * 1 pc ✧ Alligator clips * 2 pairs ✧ BNC to banana cable * 2 or 4 pcs ✧ Flexible needle * 2 pairs ✧ Hard case * 1 pc (Master Kit) ✧ Multimeter probe * 1 / pair (Master kit) ✧ Secondary ignition pickup * 1 pc (Master kit)
Warranty	Three years for Base Unit; 180 days for accessories.

Options	
Bus Decoding	Standard: UART, LIN, CAN, SPI, I ² C; Optional: ARINC-429, MIL-STD-1553B
Recommended accessory (Optional)	Customized handbag, hard shell suitcase; High-frequency AC/DC current probe: 50MHz-100MHz, 6A/30A; Low-frequency AC/DC current probe: 800KHz-2.5MHz, 10A/100A ; High-voltage differential probe: 100MHz, 700Vpk-5600Vpk; SigOFIT optical-fiber isolated probe: 100MHz - 1GHz, 85kVpk, CMRR: DC -180dB.

Micsig**Shenzhen Micsig Technology Co., Ltd.**

Tel: +86-(0)755-88600880 Email: sales@micsig.com Website: www.micsig.com

Address: 1F, Bldg A, Huafeng International Robot Industrial Park, Hangcheng Rd,
Bao'an District, Shenzhen, Guangdong, China, 518126