



ES 01 E-Field Source

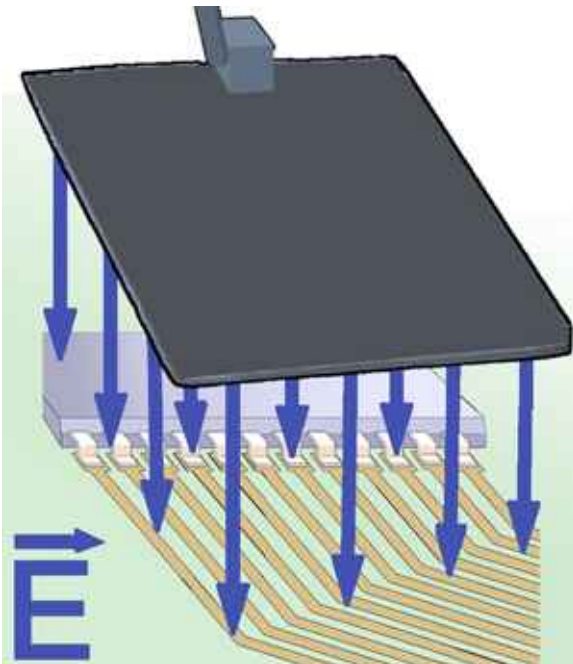

Short description

The field source is suitable for pulsing planar or line shaped weak points in the range from 5 to 10 cm. It ranges between the field source ES 02 and ES 00. ES 01 can also be used for coupling disturbance current into assemblies.

Measuring principles

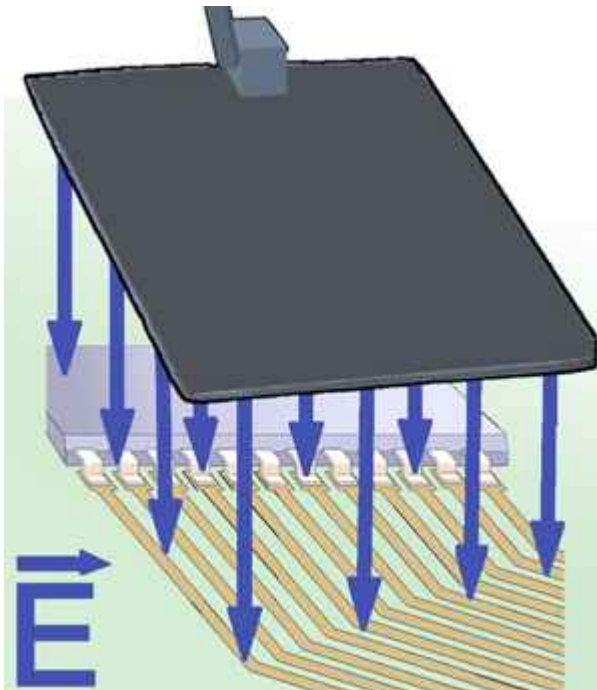

ES 01

E-Field Source

Application ES 01

