

# SHN900A Series Vector Network Analyzer



Data Sheet  
EN02C



SIGLENT TECHNOLOGIES CO., LTD.

# SHN900A

## General Description

The SIGLENT SHN900A series of Vector Network Analyzers have a frequency range of 30 kHz to 26.5 GHz, which support 2-port scattering parameter, differential-parameter, and time-domain parameter measurements. The SHN900A series of VNAs are effective instrumentation for determining the Q-factor, bandwidth, and insertion loss of a filter, the feature impedance conversion, movement of measurement plane, limit testing, ripple test, fixture simulation, and adapter removal/insertion adjustments. The VNAs have five sweep types: Linear-Frequency mode, Log-Frequency mode, Power-Sweep mode, CW-Time mode, and Segment-Sweep mode. The SHN900A series VNAs also support scattering-parameter correction of SOLT, SOLR, TRL, Response, and Enhanced Response for increased flexibility in R&D and manufacturing applications.

## Key Features

- Frequency range: 30 kHz - 26.5 GHz
- Frequency resolution: 1 Hz
- Level resolution: 0.05 dB
- Range of IFBW: 10 Hz~3 MHz
- Setting range of output level: -45 dBm ~ +10 dBm
- Dynamic range: 110 dB (Typ.)
- Types of calibration: Response calibration, Enhanced Response calibration, Full-one port calibration, Full-two port calibration, TRL calibration
- Types of measurement: Scattering-parameter measurement, differential-parameter measurement, receiver measurement, time-domain parameter analysis, limit test, ripple test, impedance conversion, fixture simulation, adapter removal/insertion, spectrum analysis frequency offset, scalar mixer measurement, pulse measurement
- Internal Bias-Tee connections
- Support GPS, Time and Location Information Saving
- Interface: LAN, USB Device, USB Host (USB-GPIB)
- Remote control: SCPI/ Labview/ IVI based on USB-TMC / VXI-11 / Socket /Telnet / WebServer
- 8.4-inch touch screen, Mouse, Keyboard




## Models and Key Specifications


| Model                         | SHN914A                                                                                                                                                                                                                                                                                                                                                   | SHN920A         | SHN926A           |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-------------------|
| Frequency range               | 30 kHz - 14 GHz                                                                                                                                                                                                                                                                                                                                           | 30 kHz - 20 GHz | 30 kHz - 26.5 GHz |
| Ports                         | 2                                                                                                                                                                                                                                                                                                                                                         |                 |                   |
| Frequency resolution          | 1 Hz                                                                                                                                                                                                                                                                                                                                                      |                 |                   |
| Level resolution              | 0.05 dB                                                                                                                                                                                                                                                                                                                                                   |                 |                   |
| Range of IFBW                 | 10 Hz ~ 3 MHz                                                                                                                                                                                                                                                                                                                                             |                 |                   |
| Setting range of output level | -45 dBm ~ +10 dBm                                                                                                                                                                                                                                                                                                                                         |                 |                   |
| Dynamic range                 | 110 dB (Typ.)                                                                                                                                                                                                                                                                                                                                             |                 |                   |
| Types of calibration          | Response calibration, Enhanced Response calibration, Full-one port calibration, Full-two port calibration, TRL calibration                                                                                                                                                                                                                                |                 |                   |
| Types of measurement          | Scattering-parameter measurement, differential-parameter measurement, receiver measurement, time-domain parameter analysis, limit test, ripple test, impedance conversion, fixture simulation, adapter removal/insertion, enhanced time-domain parameter analysis (TDR), spectrum analysis, frequency offset, scalar mixer measurement, pulse measurement |                 |                   |
| Bias-Tees                     | Support                                                                                                                                                                                                                                                                                                                                                   |                 |                   |
| Interface                     | LAN, USB Device, USB Host (USB-GPIB)                                                                                                                                                                                                                                                                                                                      |                 |                   |
| Remote control                | SCPI/ Labview/ IVI based on USB-TMC/ VXI-11/ Socket/ Telnet/ WebServer                                                                                                                                                                                                                                                                                    |                 |                   |
| Display                       | 8.4-inch touch screen                                                                                                                                                                                                                                                                                                                                     |                 |                   |
| GPS                           | Support                                                                                                                                                                                                                                                                                                                                                   |                 |                   |

## Design Features


Multi-window display:

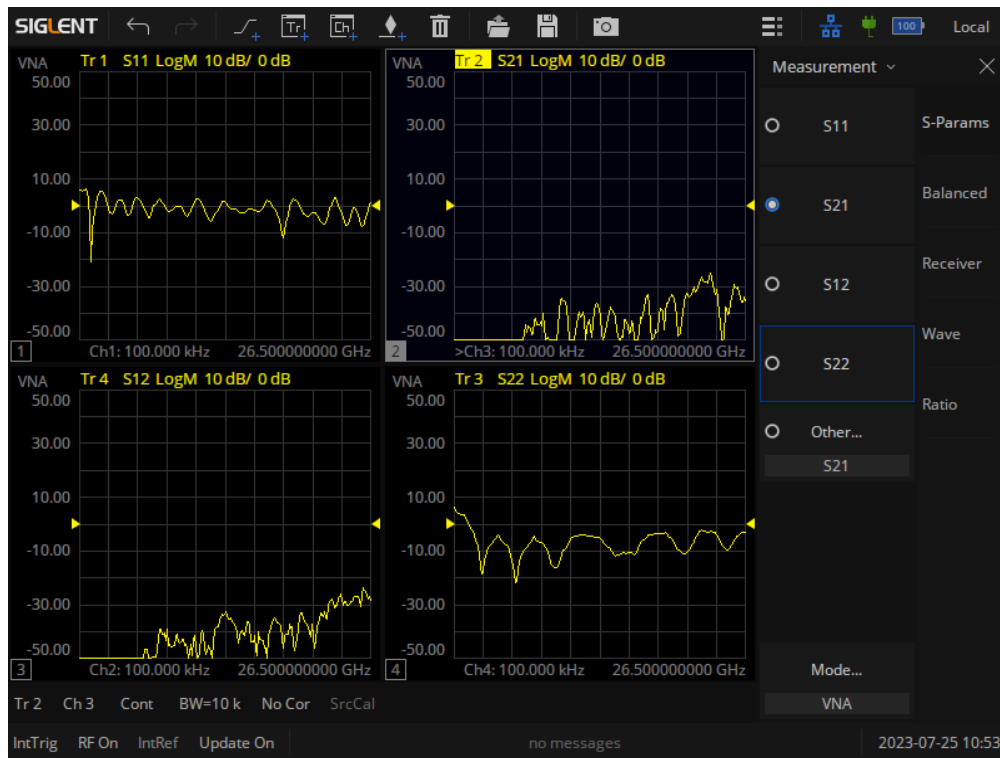


Multi-format display:

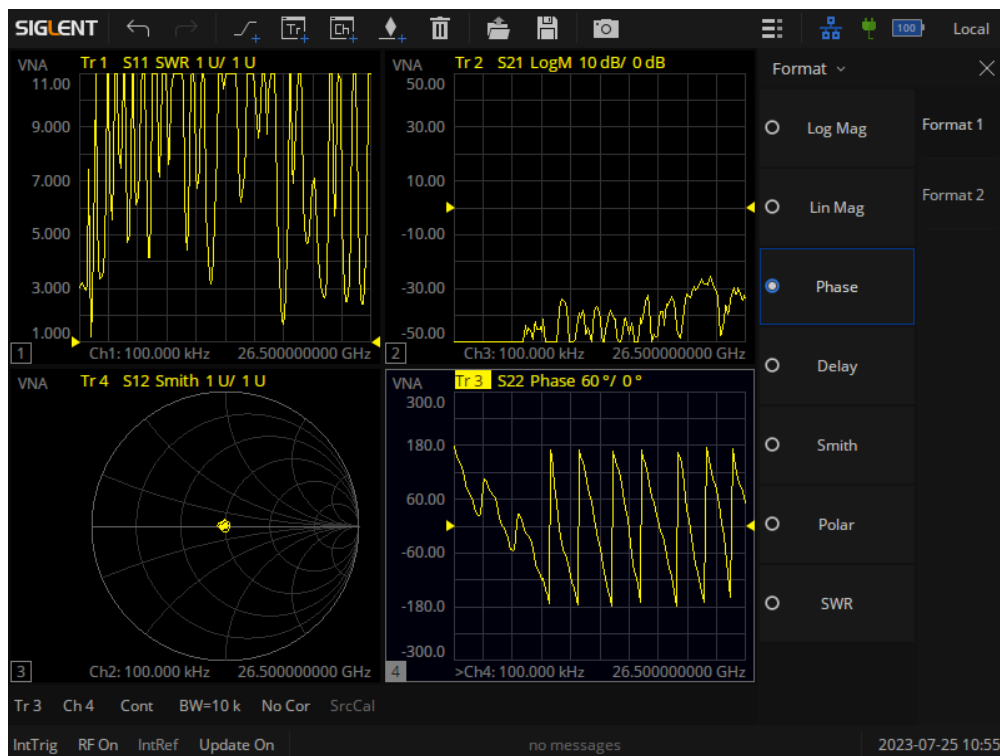


Display and compare memory and current data:

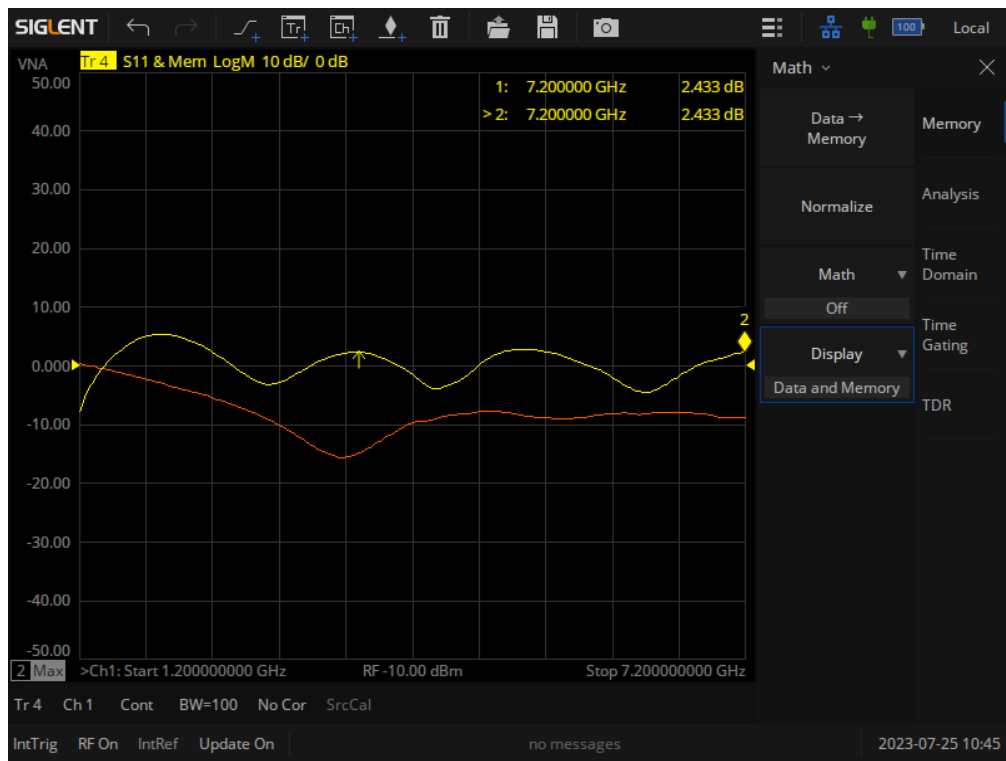


Display data hold:

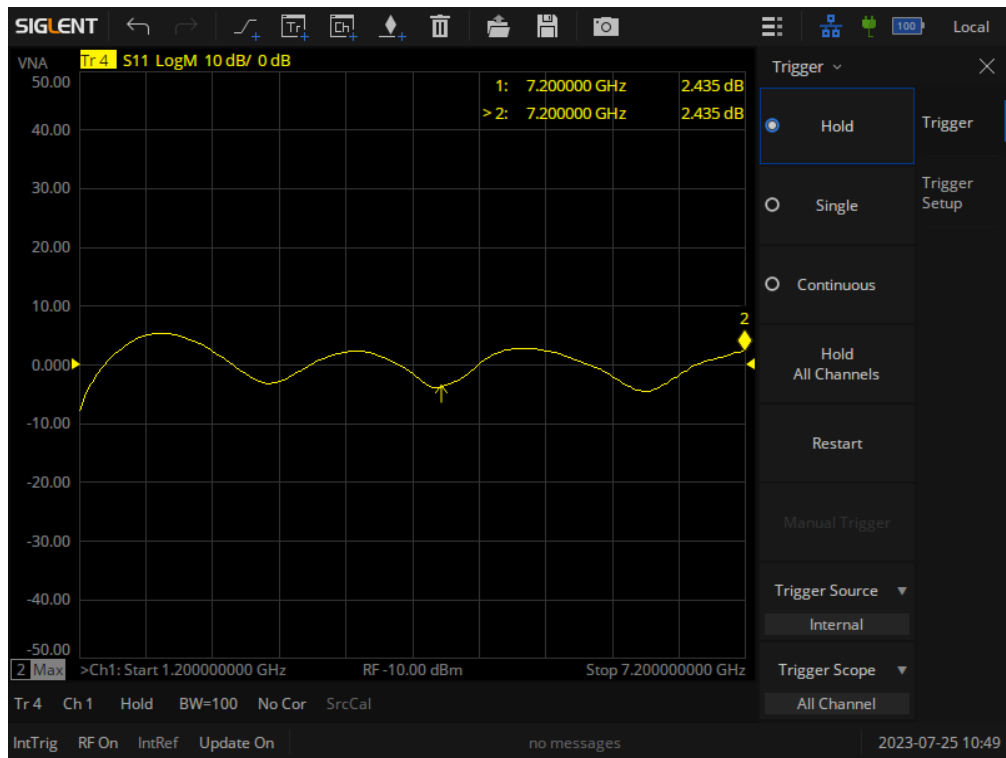


Impedance conversion:

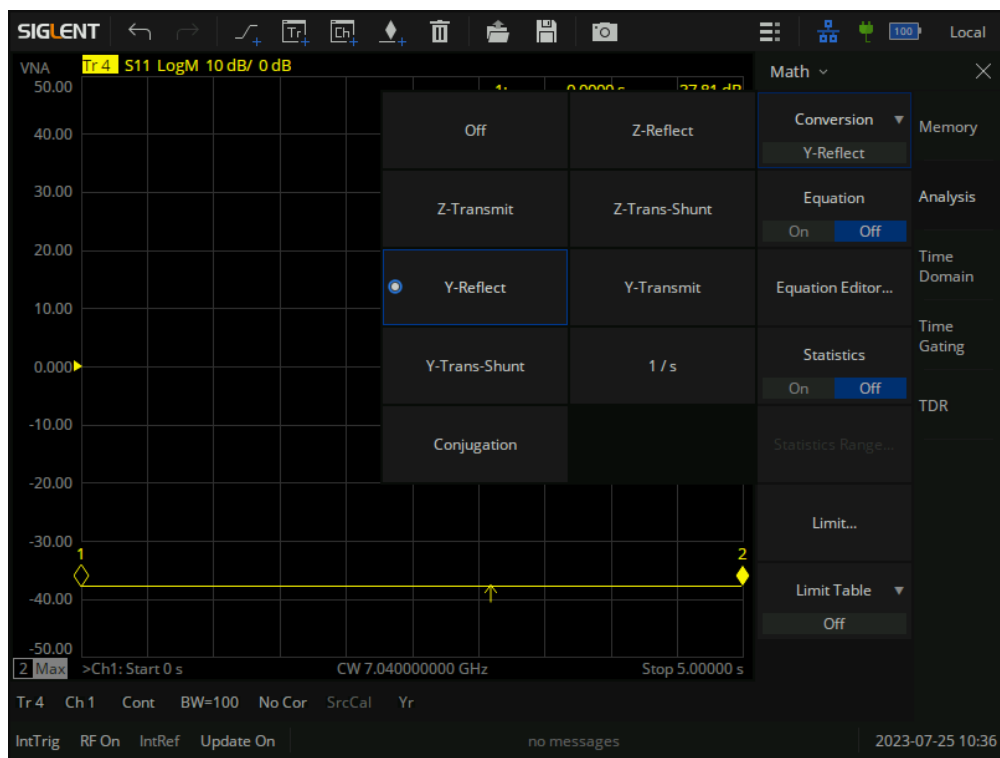


Equation Editor:

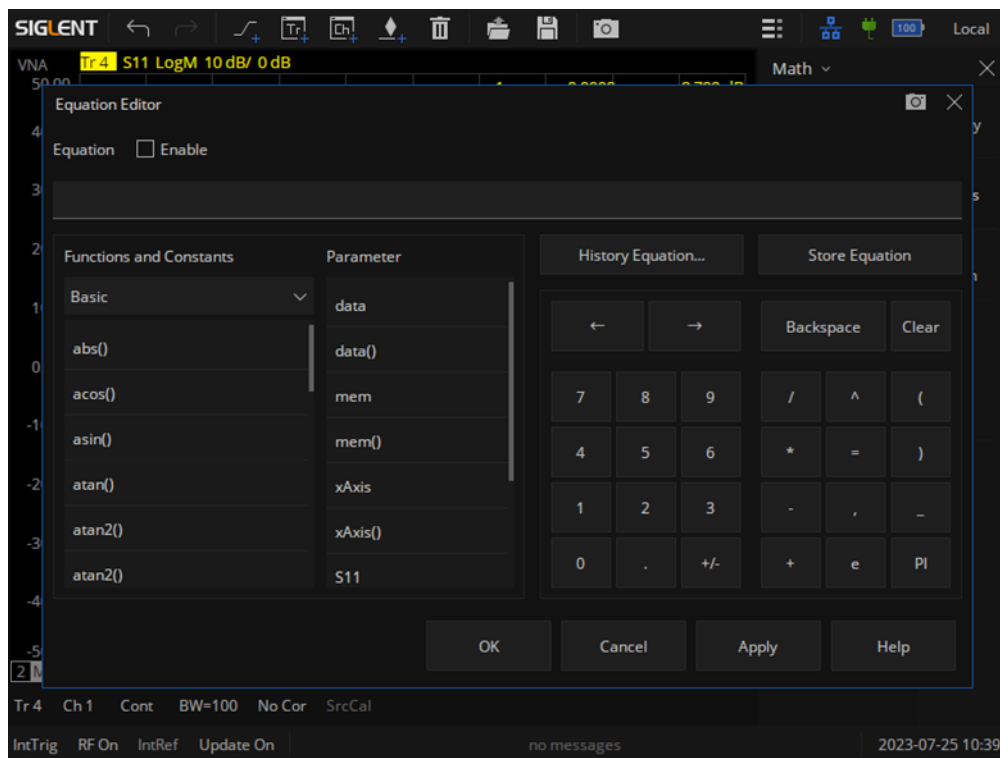


## Port Extensions:

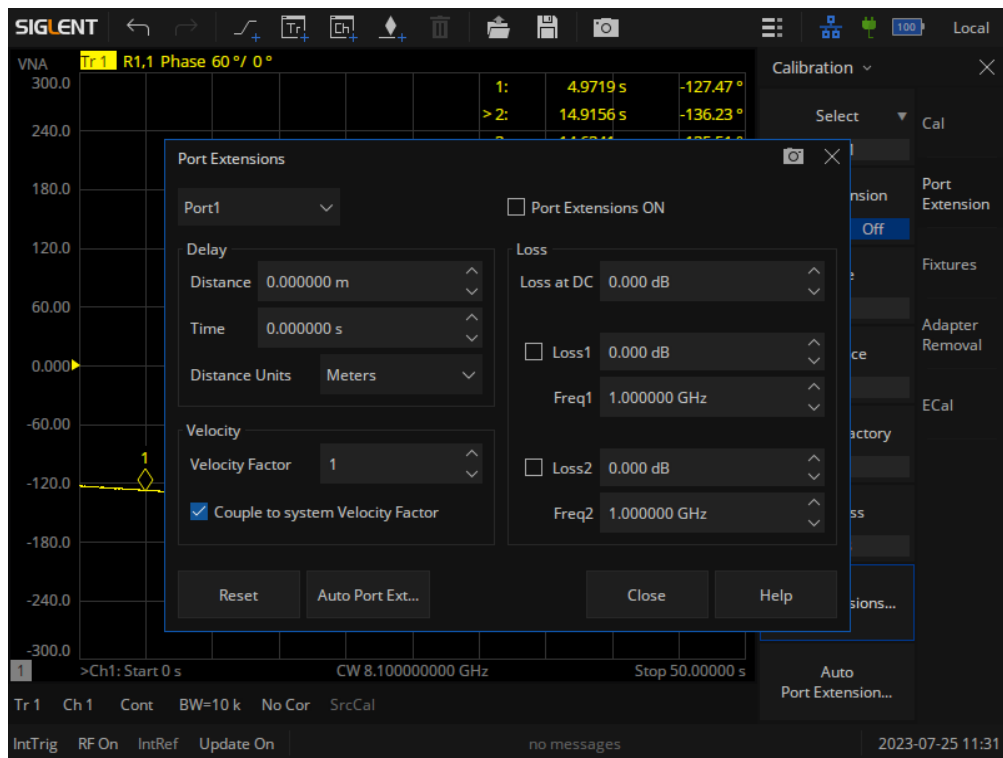


## Embedding and De-Embedding:

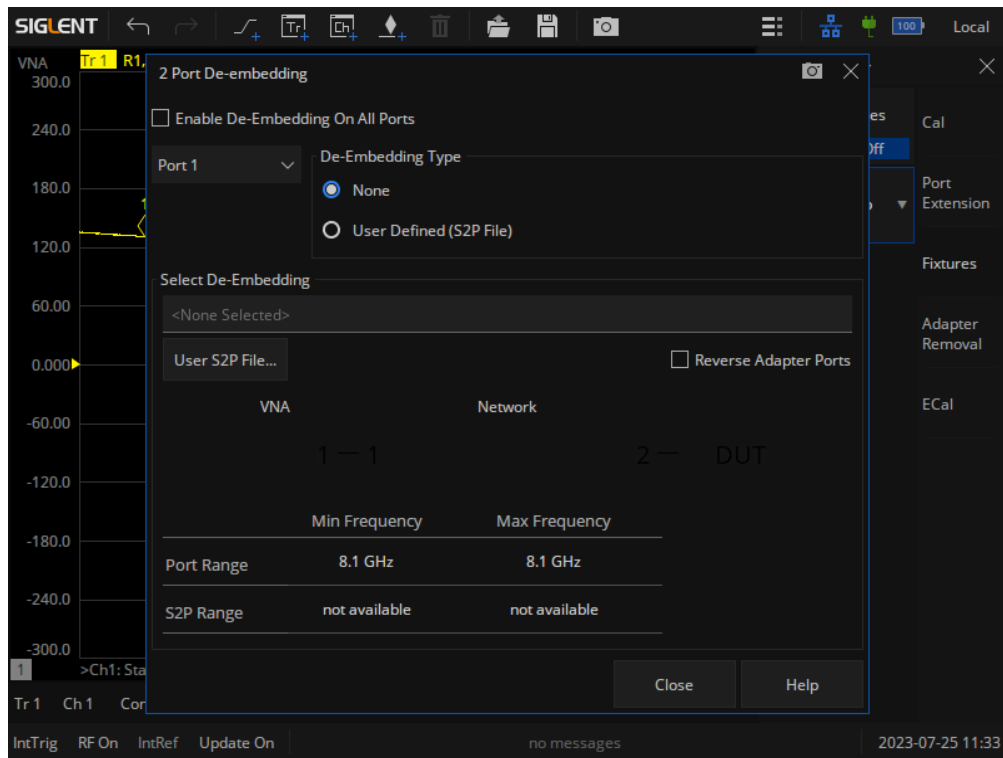

CAT:

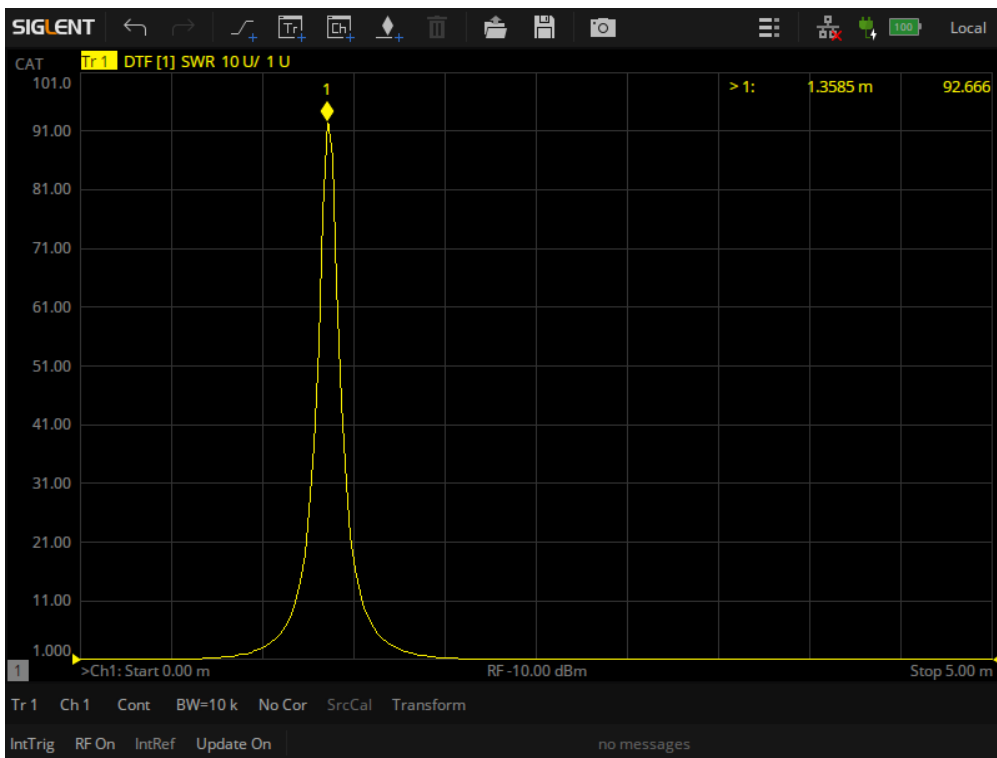

Time-Domain analysis:

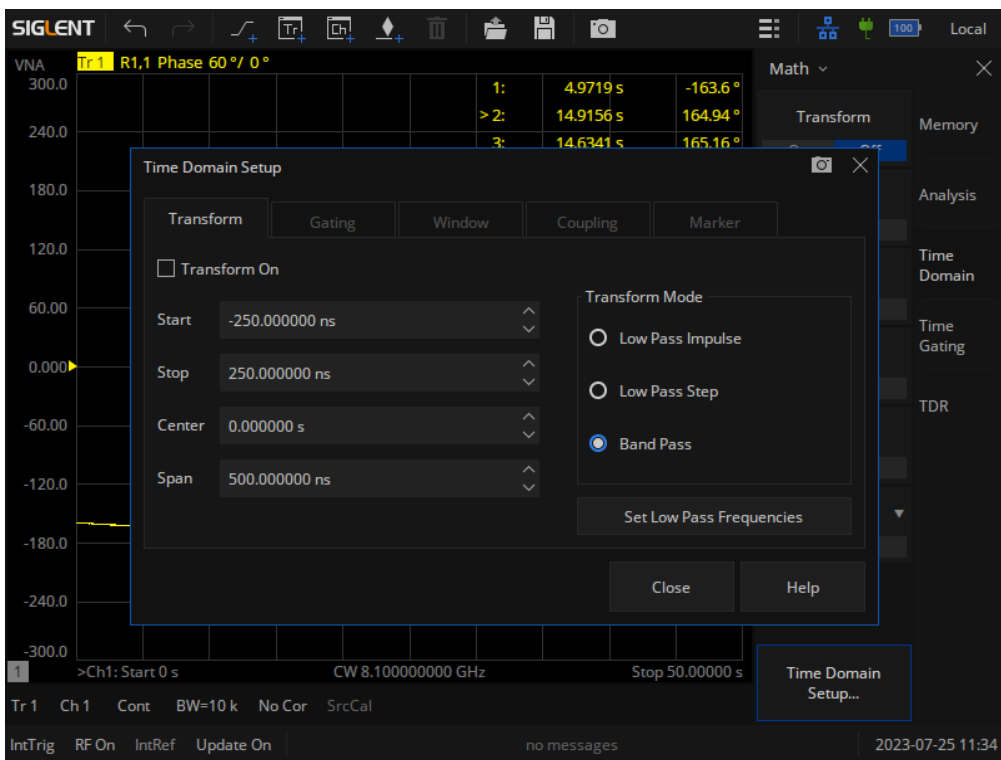





## Enhanced Time-Domain analysis(TDR):



## Spectrum analysis:

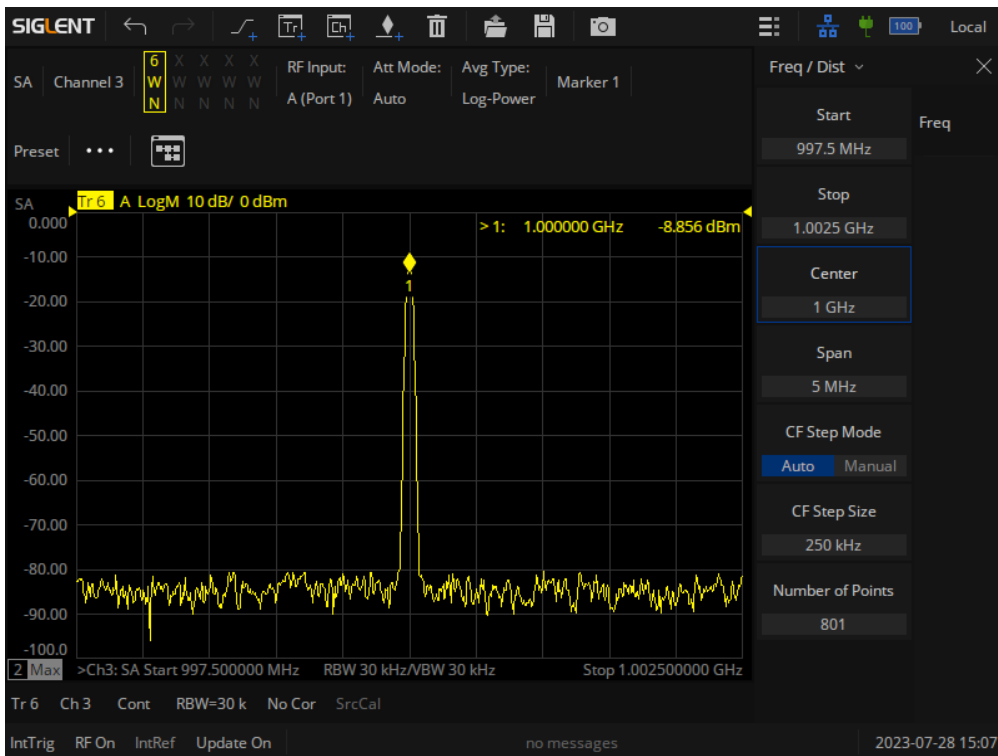

## Automatic fixture removal function(SHN900-AFR option)

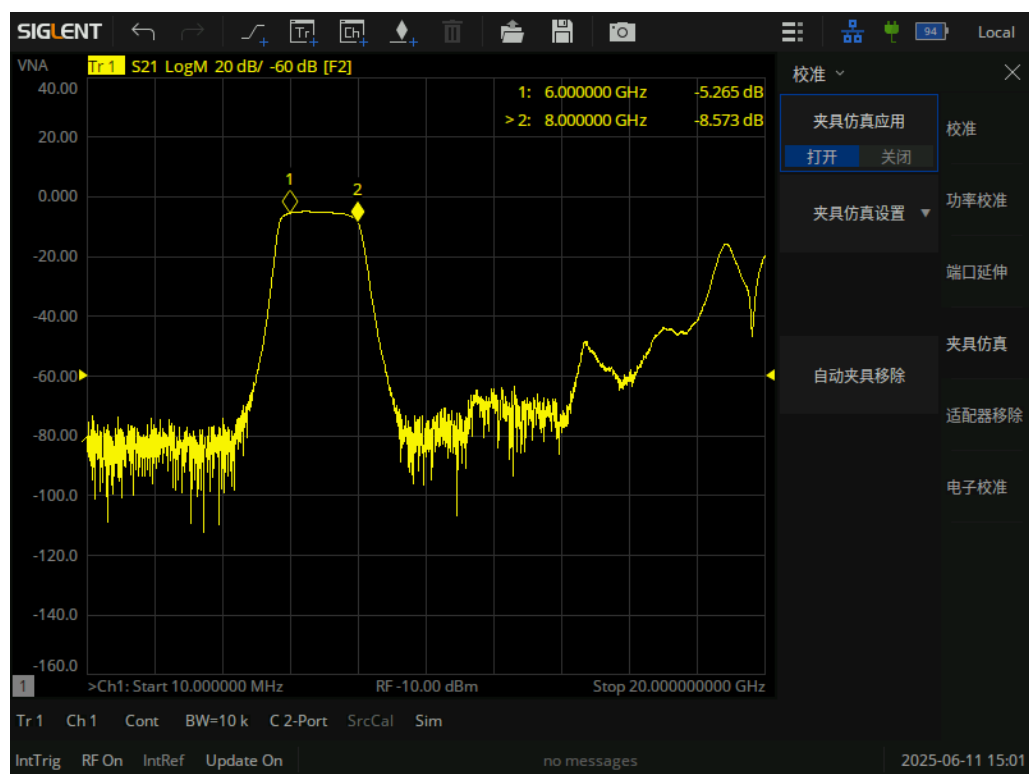

## Definitions

Specifications are valid under the following conditions: The instrument is within the calibration period, has been stored between 0 and 40 °C for at least 2 hours before use, and has been powered on and warmed up for at least 90 minutes. The specifications include the measurement uncertainty unless otherwise noted.

Specifications: All products are guaranteed to meet published specifications at room temperature (approximately 25 °C), unless otherwise noted.

Typical: Performance deemed typical implies that 80 percent of the measurement results will meet the typical published performance with a 95th percentile confidence level at room temperature (approximately 25 °C). Typical performance is not warranted and does not include measurement uncertainty.

Nominal: This value indicates the expected mean or average performance, or an attribute whose performance is by design, such as the 50 Ohm connector.

## Specifications

### Dynamic range

| Frequency Range              | IFBW  | Specification (dB) | Typical (dB) |
|------------------------------|-------|--------------------|--------------|
| 30 kHz - 50 kHz              | 10 Hz | 60                 | 70           |
| 50 kHz - 200 kHz             |       | 80                 | 100          |
| 200 kHz – 6.2 GHz            |       | 100                | 120          |
| 6.2 GHz - 9 GHz <sup>1</sup> |       | 100                | 105          |
| 9 GHz - 20 GHz               |       | 100                | 115          |
| 20 GHz - 26.5 GHz            |       | 70                 | 100          |

(1) Some special frequencies will degrade


### Corrected system performance with calibration kit

User correction: On, system correction: On; Corrected system performance with Keysight 85052D 3.5mm calibration kit, isolation calibration performed. IFBW is 10 Hz, no averaging applied to data, and environmental temperature is 25°C (± 5°C), with <1°C deviation from calibration temperature.


| Specification (dB) | 30 kHz-3 GHz | 3 GHz-6 GHz | 6 GHz-14 GHz | 14 GHz-20 GHz | 14 GHz-26.5 GHz |
|--------------------|--------------|-------------|--------------|---------------|-----------------|
| Directivity        | 41           | 38          | 32           | 30            | 30              |
| Source match       | 38           | 32          | 30           | 30            | 28              |
| Load match         | 42           | 38          | 35           | 32            | 30              |
| Reflect tracking   | ±0.02        | ±0.06       | ±0.07        | ±0.08         | ±0.1            |

|                       |           |            |            |           |            |
|-----------------------|-----------|------------|------------|-----------|------------|
| Transmission tracking | $\pm 0.1$ | $\pm 0.15$ | $\pm 0.25$ | $\pm 0.3$ | $\pm 0.51$ |
|-----------------------|-----------|------------|------------|-----------|------------|

Reflection uncertainty (Specification, Power: -10 dBm, IFBW:10 Hz):

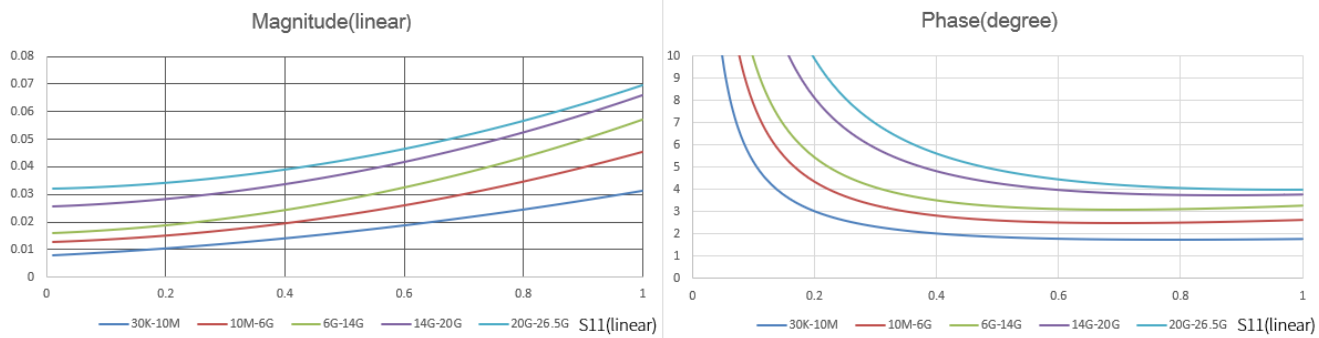

Transmission uncertainty (Specification, Power: -10 dBm, IFBW:10 Hz):

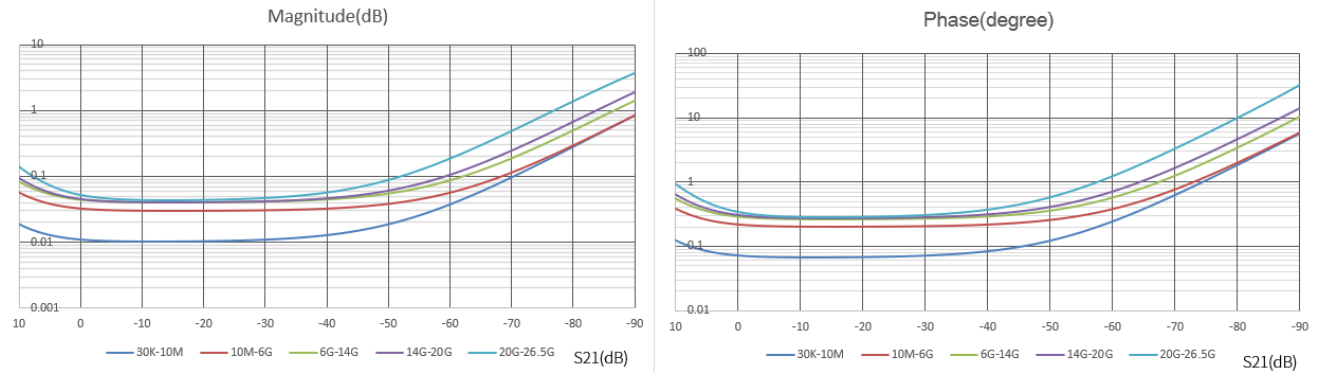

## Uncorrected system performance

User correction: Off, system correction: On; IFBW is 10 Hz, no averaging applied to data.

| Specification (dB)    | 30 kHz – 300 kHz | 300 kHz - 1 GHz | 1 GHz-6 GHz | 6 GHz-26.5 GHz |
|-----------------------|------------------|-----------------|-------------|----------------|
| Directivity           | 15               | 20              | 25          | 20             |
| Source match          | 20               | 25              | 25          | 20             |
| Load match            | 6                | 6               | 12          | 7              |
| Reflect tracking      | ±1.0             | ±1.0            | ±1.0        | ±1.0           |
| Transmission tracking | ±1.0             | ±1.0            | ±1.0        | ±1.0           |

## Test port output (Source)

### Test port output frequency

| Description          | Specification                                                           |
|----------------------|-------------------------------------------------------------------------|
| Frequency range      |                                                                         |
| SHN914A              | 30 kHz to 14 GHz                                                        |
| SHN920A              | 30 kHz to 20 GHz                                                        |
| SHN926A              | 30 kHz to 26.5 GHz                                                      |
| Frequency resolution | 1 Hz                                                                    |
| CW accuracy          |                                                                         |
| Standard             | $\pm 5.0$ ppm ( $23 \pm 3$ °C)                                          |
| Source stability     |                                                                         |
| Standard             | $\pm 5.0$ ppm (0 to 40 °C)<br>$\pm 0.5$ ppm/year, $\pm 3.0$ ppm/20 year |

### Test port output power

| Description       | Specification                                                            |
|-------------------|--------------------------------------------------------------------------|
| Preset power      | -10 dBm                                                                  |
| Level accuracy    | $\pm 2$ dB@-10 dBm 30kHz ~ 20GHz<br>$\pm 2.5$ dB@-10 dBm 20GHz ~ 26.5GHz |
| Level linearity   |                                                                          |
| 30 kHz - 100 kHz  | $\pm 1$ dB (-20 dBm to -11 dBm)                                          |
| 100 kHz - 25 MHz  | $\pm 1$ dB (-20 dBm to -5 dBm)                                           |
| 25 MHz - 14 GHz   | $\pm 1$ dB (-20 dBm to -1 dBm)                                           |
| 14 GHz - 20 GHz   | $\pm 1$ dB (-20 dBm to -4 dBm)                                           |
| 20 GHz - 24 GHz   | $\pm 2$ dB (-20 dBm to -6 dBm)                                           |
| 24 GHz - 26.5 GHz | $\pm 2$ dB (-20 dBm to -8 dBm)                                           |
| Range             |                                                                          |
| 30 kHz - 100 kHz  | -45 dBm to -11 dBm                                                       |
| 100 kHz - 25 MHz  | -45 dBm to -5 dBm                                                        |
| 25 MHz - 14 GHz   | -45 dBm to -1 dBm                                                        |
| 14 GHz - 20 GHz   | -45 dBm to -4 dBm                                                        |
| 20 GHz - 24 GHz   | -45 dBm to -6 dBm                                                        |

|                   |                    |
|-------------------|--------------------|
| 24 GHz - 26.5 GHz | -45 dBm to -8 dBm  |
| Sweep range       |                    |
| 30 kHz - 100 kHz  | -45 dBm to -11 dBm |
| 100 kHz - 25 MHz  | -45 dBm to -5 dBm  |
| 25 MHz - 14 GHz   | -45 dBm to -1 dBm  |
| 14 GHz - 20 GHz   | -45 dBm to -4 dBm  |
| 20 GHz - 24 GHz   | -45 dBm to -6 dBm  |
| 24 GHz - 26.5 GHz | -45 dBm to -8 dBm  |
| Max leveled power |                    |
| 30 kHz - 100 kHz  | -11 dBm (Typ.)     |
| 100 kHz - 25 MHz  | -4 dBm (Typ.)      |
| 25 MHz - 100 MHz  | 0 dBm (Typ.)       |
| 100 MHz - 6 GHz   | 2 dBm (Typ.)       |
| 6 GHz - 8 GHz     | 0 dBm (Typ.)       |
| 8 GHz - 14 GHz    | 2 dBm (Typ.)       |
| 14GHz - 20 GHz    | 0 dBm (Typ.)       |
| 20 GHz - 26.5 GHz | -6 dBm (Typ.)      |
| Level resolution  | 0.05 dB            |

### Test port output signal purity

| Description                   | Specification   |
|-------------------------------|-----------------|
| 2nd or 3rd harmonics (0 dBm)  |                 |
| 100 kHz to 25 MHz             | <-10 dBc (Typ.) |
| 25 MHz to 8 GHz               | <-10 dBc (Typ.) |
| 9 GHz to 26.5 GHz             | <-10 dBc (Typ.) |
| Non-harmonic spurious (0 dBm) | <-20 dBc (Typ.) |

## Test port input

### Test port input levels

| Description                  | Specification             | Typical         |
|------------------------------|---------------------------|-----------------|
| Max input level              |                           |                 |
| 30 kHz - 14 GHz              | +10 dBm                   |                 |
| 14 GHz - 26.5 GHz            | +10 dBm                   |                 |
| Damage input level           |                           |                 |
| 30 kHz - 26.5 GHz            | +27 dBm (RF) or 35 V (DC) |                 |
| Precision                    |                           |                 |
| 30 kHz -1 GHz                | ±2.0 dB@-10 dBm           | ±0.5 dB@-10 dBm |
| 1 GHz - 20 GHz               | ±2.0 dB@-10 dBm           | ±0.2 dB@-10 dBm |
| 20 GHz – 26.5 GHz            | ±2.5 dB@-10 dBm           | ±0.5 dB@-10 dBm |
| Crosstalk                    |                           |                 |
| 30 kHz -100 kHz              | -75 dB                    | -105 dB         |
| 100 kHz - 6 GHz              | -75 dB                    | -120 dB         |
| 6 GHz - 9 GHz                | -80 dB                    | -105 dB         |
| 9 GHz - 20 GHz               | -95 dB                    | -105 dB         |
| 20 GHz - 26.5 GHz            | -60 dB                    | -70 dB          |
| Noise floor                  |                           |                 |
| 30 kHz - 50 kHz              | -70 dBm/Hz                | -80 dBm/Hz      |
| 50 kHz - 200 kHz             | -90 dBm/Hz                | -110 dBm/Hz     |
| 200 kHz - 6.2 GHz            | -100 dBm/Hz               | -120 dBm/Hz     |
| 6.2 GHz - 9 GHz <sup>2</sup> | -100 dBm/Hz               | -110 dBm/Hz     |
| 9 GHz - 20 GHz               | -100 dBm/Hz               | -115 dBm/Hz     |
| 20 GHz - 26.5 GHz            | -80 dBm/Hz                | -110 dBm/Hz     |
| Compression level (+10 dBm)  |                           |                 |
| Magnitude                    |                           |                 |
| 30 kHz- 26.5 GHz             |                           | 1 dB            |
| Phase                        |                           |                 |
| 30 kHz - 26.5 GHz            |                           | 5 deg           |

(2) Some special frequencies will degrade



## Trace noise

| Description                                  | Specification | Typical       |
|----------------------------------------------|---------------|---------------|
| Note: Setting max output power               |               |               |
| Transmission trace noise magnitude           |               |               |
| 30 kHz- 500 MHz (IFBW=10 kHz) <sup>[1]</sup> | 0.009 dB rms  | 0.002 dB rms  |
| 500 MHz- 4.5 GHz (IFBW=10 kHz)               | 0.006 dB rms  | 0.0015 dB rms |
| 4.5 GHz- 8 GHz (IFBW=10 kHz)                 | 0.006 dB rms  | 0.0015 dB rms |
| 8 GHz- 18 GHz (IFBW=10 kHz)                  | 0.010 dB rms  | 0.003 dB rms  |
| 18 GHz- 26.5 GHz (IFBW=10 kHz)               | 0.020 dB rms  | 0.008 dB rms  |
| Reflection trace noise magnitude             |               |               |
| 30 kHz- 500 MHz (IFBW=10 kHz) <sup>[1]</sup> | 0.009 dB rms  | 0.002 dB rms  |
| 500 MHz- 4.5 GHz (IFBW=10 kHz)               | 0.006 dB rms  | 0.0015 dB rms |
| 4.5 GHz- 8 GHz (IFBW=10 kHz)                 | 0.006 dB rms  | 0.0015 dB rms |
| 8 GHz- 18 GHz (IFBW=10 kHz)                  | 0.010 dB rms  | 0.003 dB rms  |
| 18 GHz- 26.5 GHz (IFBW=10 kHz)               | 0.020 dB rms  | 0.008 dB rms  |
| Transmission trace noise phase               |               |               |
| 30 kHz- 500 MHz (IFBW=10 kHz) <sup>[1]</sup> | 0.09 deg rms  | 0.015 deg rms |
| 500 MHz- 4.5 GHz (IFBW=10 kHz)               | 0.05 deg rms  | 0.01 deg rms  |
| 4.5 GHz- 8 GHz (IFBW=10 kHz)                 | 0.05 deg rms  | 0.015 deg rms |
| 8 GHz- 18 GHz (IFBW=10 kHz)                  | 0.06 deg rms  | 0.025 deg rms |
| 18 GHz- 26.5 GHz (IFBW=10 kHz)               | 0.12 deg rms  | 0.06 deg rms  |
| Reflection trace noise phase                 |               |               |
| 30 kHz- 500 MHz (IFBW=10 kHz) <sup>[1]</sup> | 0.09 deg rms  | 0.015 deg rms |
| 500 MHz- 4.5 GHz (IFBW=10 kHz)               | 0.05 deg rms  | 0.01 deg rms  |
| 4.5 GHz- 8 GHz (IFBW=10 kHz)                 | 0.05 deg rms  | 0.015 deg rms |
| 8 GHz- 18 GHz (IFBW=10 kHz)                  | 0.06 deg rms  | 0.025 deg rms |
| 18 GHz- 26.5 GHz (IFBW=10 kHz)               | 0.12 deg rms  | 0.06 deg rms  |

[1] 21.25MHz frequency point does not meet the specification requirements

## Stability

| Description      | Specification | Typical                                 |
|------------------|---------------|-----------------------------------------|
| Magnitude        |               |                                         |
| 30 kHz- 1 MHz    |               | $\pm 0.02 \text{ dB/}^{\circ}\text{C}$  |
| 1 MHz- 6 GHz     |               | $\pm 0.01 \text{ dB/}^{\circ}\text{C}$  |
| 6 GHz- 14 GHz    |               | $\pm 0.025 \text{ dB/}^{\circ}\text{C}$ |
| 14 GHz- 24 GHz   |               | $\pm 0.04 \text{ dB/}^{\circ}\text{C}$  |
| 24 GHz- 26.5 GHz |               | $\pm 0.1 \text{ dB/}^{\circ}\text{C}$   |
| Phase            |               |                                         |
| 30 kHz- 1 MHz    |               | $\pm 0.4 \text{ deg/}^{\circ}\text{C}$  |
| 1 MHz- 6 GHz     |               | $\pm 0.2 \text{ deg/}^{\circ}\text{C}$  |
| 6 GHz- 14 GHz    |               | $\pm 0.5 \text{ deg/}^{\circ}\text{C}$  |
| 14 GHz- 24 GHz   |               | $\pm 0.6 \text{ deg/}^{\circ}\text{C}$  |
| 24 GHz- 26.5 GHz |               | $\pm 1.0 \text{ deg/}^{\circ}\text{C}$  |

## Dynamic accuracy

| Description                     | Specification   |
|---------------------------------|-----------------|
| Relative to -10 dBm input power |                 |
| Magnitude                       |                 |
| 10 dBm                          | $\pm 2.29$ dB   |
| 0 dBm                           | $\pm 0.09$ dB   |
| -20 dBm                         | $\pm 0.13$ dB   |
| -30 dBm                         | $\pm 0.19$ dB   |
| -40 dBm                         | $\pm 0.27$ dB   |
| -50 dBm                         | $\pm 0.39$ dB   |
| -60 dBm                         | $\pm 0.59$ dB   |
| -70 dBm                         | $\pm 0.85$ dB   |
| -80 dBm                         | $\pm 1.95$ dB   |
| -90 dBm                         | $\pm 2.35$ dB   |
| -100 dBm                        | $\pm 2.5$ dB    |
| Phase                           |                 |
| 10 dBm                          | $\pm 14.5$ deg  |
| 0 dBm                           | $\pm 1.45$ deg  |
| -20 dBm                         | $\pm 1.85$ deg  |
| -30 dBm                         | $\pm 3.99$ deg  |
| -40 dBm                         | $\pm 5.27$ deg  |
| -50 dBm                         | $\pm 6.39$ deg  |
| -60 dBm                         | $\pm 8.59$ deg  |
| -70 dBm                         | $\pm 10.85$ deg |
| -80 dBm                         | $\pm 11.95$ deg |
| -90 dBm                         | $\pm 12.35$ deg |
| -100 dBm                        | $\pm 16.5$ deg  |

## SA Mode

| Description                     |                            | Specification     | Typical                                                                                                     |
|---------------------------------|----------------------------|-------------------|-------------------------------------------------------------------------------------------------------------|
| Power range                     |                            | -70 dBm - +10 dBm |                                                                                                             |
| Noise floor                     | 30 kHz - 1 MHz             |                   | -115 dBm/Hz                                                                                                 |
|                                 | 1 MHz - 100 MHz            |                   | -110 dBm/Hz                                                                                                 |
|                                 | 100 MHz - 5 GHz            |                   | -120 dBm/Hz                                                                                                 |
|                                 | 5 GHz - 9 GHz <sup>2</sup> |                   | -105 dBm/Hz                                                                                                 |
|                                 | 9 GHz - 22 GHz             |                   | -110 dBm/Hz                                                                                                 |
|                                 | 22 GHz - 26.5 GHz          |                   | -100 dBm/Hz                                                                                                 |
| Phase noise (Normal)            |                            |                   | $\leq -105$ dBc/Hz (1 GHz@10 kHz)<br>$\leq -110$ dBc/Hz (1 GHz@100 kHz)<br>$\leq -125$ dBc/Hz (1 GHz@1 MHz) |
| Max input level without damaged |                            | 27 dBm            |                                                                                                             |
| Residual response               |                            |                   | $\leq -70$ dBm                                                                                              |

## CAT Mode

| Description            | Specification                                                                                                |
|------------------------|--------------------------------------------------------------------------------------------------------------|
| DTF                    | Range: Velocity Factor x Light Velocity x (Points Number- 1)/BW x 2<br>Resolution: Range/ (Points Number- 1) |
| Return loss range (dB) | -6k dB - +6k dB                                                                                              |
| VSWR resolution        | 1m dB - 1k dB                                                                                                |
| VSWR range             | 1.001 - 1G                                                                                                   |
| VSWR resolution        | 0.001                                                                                                        |

## Sweep time

|                                                                   |        |        |         |          |
|-------------------------------------------------------------------|--------|--------|---------|----------|
| Start frequency: 30 kHz, Stop frequency: 14 GHz; IFBW: 500 kHz.   |        |        |         |          |
| Points                                                            | 201    | 401    | 1601    | 6401     |
| 2-port cal                                                        | 28 ms  | 40 ms  | 160 ms  | 600 ms   |
| Start frequency: 30 kHz, Stop frequency: 14 GHz; IFBW: 100 kHz.   |        |        |         |          |
| Points                                                            | 201    | 401    | 1601    | 6401     |
| 2-port cal                                                        | 30 ms  | 42 ms  | 180 ms  | 640 ms   |
| Start frequency: 30 kHz, Stop frequency: 14 GHz; IFBW: 10 kHz.    |        |        |         |          |
| Points                                                            | 201    | 401    | 1601    | 6401     |
| 2-port cal                                                        | 60 ms  | 75 ms  | 350 ms  | 1400 ms  |
| Start frequency: 30 kHz, Stop frequency: 14 GHz; IFBW: 1 kHz.     |        |        |         |          |
| Points                                                            | 201    | 401    | 1601    | 6401     |
| 2-port cal                                                        | 300 ms | 500 ms | 2500 ms | 10000 ms |
| Start frequency: 30 kHz, Stop frequency: 26.5 GHz; IFBW: 500 kHz. |        |        |         |          |
| Points                                                            | 201    | 401    | 1601    | 6401     |
| 2-port cal                                                        | 28 ms  | 40 ms  | 160 ms  | 600 ms   |
| Start frequency: 30 kHz, Stop frequency: 26.5 GHz; IFBW: 100 kHz. |        |        |         |          |
| Points                                                            | 201    | 401    | 1601    | 6401     |
| 2-port cal                                                        | 30 ms  | 42 ms  | 180 ms  | 640 ms   |
| Start frequency: 30 kHz, Stop frequency: 26.5 GHz; IFBW: 10 kHz.  |        |        |         |          |
| Points                                                            | 201    | 401    | 1601    | 6401     |
| 2-port cal                                                        | 60 ms  | 75 ms  | 350 ms  | 1400 ms  |
| Start frequency: 30 kHz, Stop frequency: 26.5 GHz; IFBW: 1 kHz.   |        |        |         |          |
| Points                                                            | 201    | 401    | 1601    | 6401     |
| 2-port cal                                                        | 300 ms | 500 ms | 2500 ms | 10000 ms |

## General information

| Description                                                                                                                        | Characteristics                                                                                                                                        |
|------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating environment                                                                                                              |                                                                                                                                                        |
| Temperature                                                                                                                        | 0 to 50 °C                                                                                                                                             |
| Humidity                                                                                                                           | 20% to 80% at wet bulb temperature < +29 °C (non-condensation)                                                                                         |
| Altitude                                                                                                                           | 0 to 3000 m                                                                                                                                            |
| Non-operating storage environment                                                                                                  |                                                                                                                                                        |
| Temperature                                                                                                                        | -20 °C to 70 °C                                                                                                                                        |
| Humidity                                                                                                                           | 20% to 90% at wet bulb temperature < +40 °C (non-condensation)                                                                                         |
| Altitude                                                                                                                           | 0 to 15000 m                                                                                                                                           |
| Size                                                                                                                               | W x H x D=310 mm x 215 mm x 78.5 mm                                                                                                                    |
| Weight                                                                                                                             | 3.2 kg                                                                                                                                                 |
| EMC                                                                                                                                |                                                                                                                                                        |
| Conducted disturbance: CISPR 11/EN 55011                                                                                           | CLASS A group 1, 150 kHz - 30 MHz                                                                                                                      |
| Radiated disturbance: CISPR 11/EN 55011                                                                                            | CLASS A group 1, 30 MHz - 1 GHz                                                                                                                        |
| Electrostatic discharge (ESD):<br>IEC61000-4-2/EN61000-4-2                                                                         | 4.0 kV (contact), 8.0 kV (air)                                                                                                                         |
| Radio-frequency electromagnetic field<br>Immunity:<br>IEC 61000-4-3/EN 61000-4-3                                                   | 10 V/m (80 MHz to 1 GHz);<br>3 V/m (1.4 GHz to 2 GHz);<br>1 V/m (2.0 GHz to 2.7 GHz)                                                                   |
| Electrical fast transients (EFT):<br>IEC 61000-4-4/EN 61000-4-4                                                                    | 2 kV (AC power ports)                                                                                                                                  |
| Surges: IEC 61000-4-5/EN 61000-4-5                                                                                                 | 1 kV (Line to line); 2 kV (Line to ground)                                                                                                             |
| Radio-frequency continuous conducted<br>Immunity: IEC 61000-4-6/EN 61000-4-6                                                       | 3 V, 0.15-80 MHz                                                                                                                                       |
| Voltage dips and interruptions:<br>IEC 61000-4-11/EN 61000-4-11                                                                    | Voltage dips:<br>0% UT during 1 cycle;<br>40% UT during 10/12 cycles;<br>70% UT during 25/30 cycles;<br>Voltage interruptions: 0% UT during 250 cycles |
| Safety                                                                                                                             |                                                                                                                                                        |
| UL 61010-1:2012/R: 2018-11; CAN/CSA-C22.2 No. 61010-1:2012/A1:2018-11.<br>UL 61010-2-030:2018; CAN/CSA-C22.2 No. 61010-2-030:2018. |                                                                                                                                                        |




## Panel information


| Top Panel                 |                                                                                                              |
|---------------------------|--------------------------------------------------------------------------------------------------------------|
| RF connectors             | 3.5 mm NMD (male), 50 $\Omega$                                                                               |
| USB Host                  | USB-A 2.0                                                                                                    |
| USB Device                | USB-C 2.0                                                                                                    |
| LAN                       | LAN (VXI11), 10/100 Base, RJ-45                                                                              |
| GPS Antenna               | SMA Female, 3.3 V, 50 $\Omega$                                                                               |
| Bias Out                  | SMB Female, 12 V - 32 V, step 0.1 V                                                                          |
| External Trigger Input    | 1 k $\Omega$ , 5 V TTL, BNC Female                                                                           |
| 10M Reference Input       | 10 MHz, -5 dBm ~ +10 dBm, BNC Female, 50 $\Omega$                                                            |
| Remote control            |                                                                                                              |
| Hardware connectors       | LAN, USB-TMC, GPIB (USB-GPIB adaptor)                                                                        |
| Remote control interfaces | SCPI/ Labview/ IVI based on USB-TMC/ VXI-11/ GPIB/ Socket/Telnet<br>NI-MAX<br>Web Browser (HTML 5 Supported) |




## Physical Dimensions

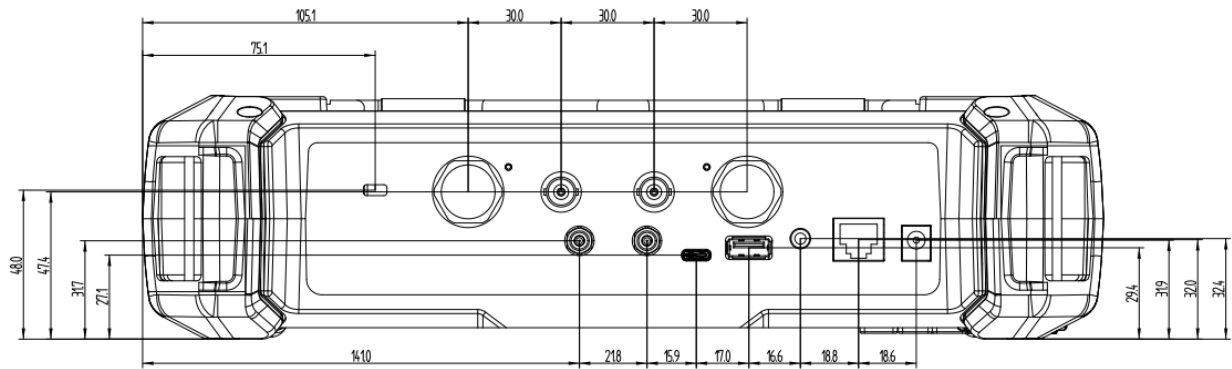


Top view (bottom near screen)

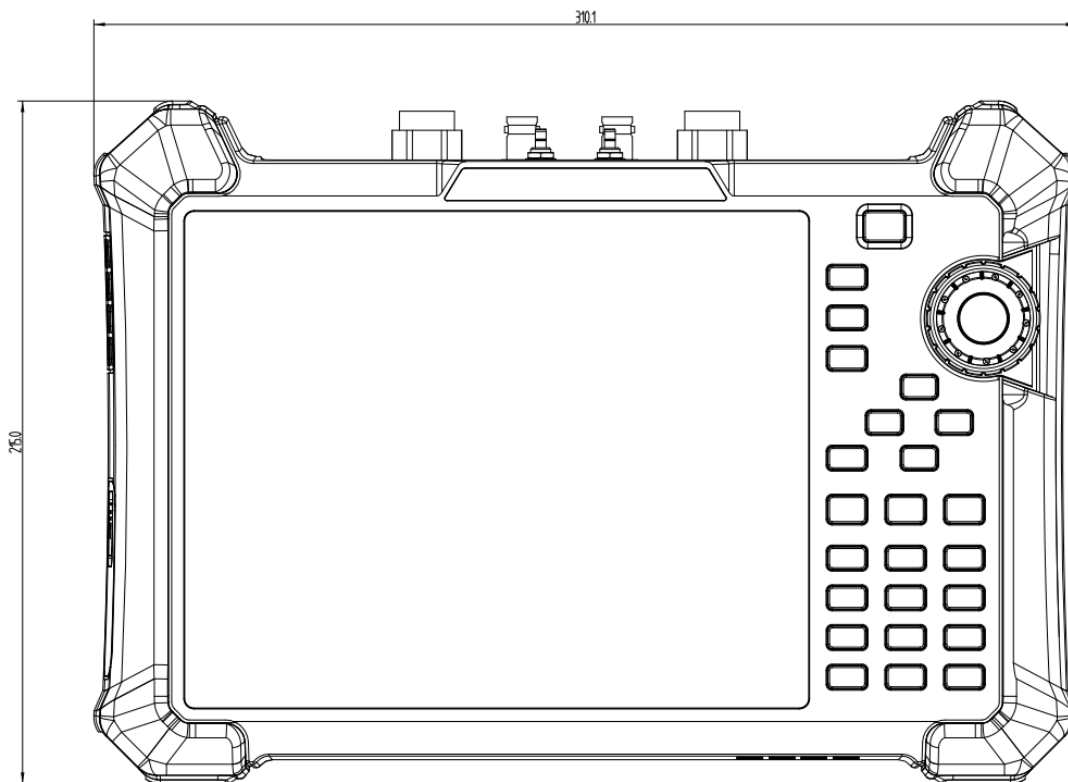

front view

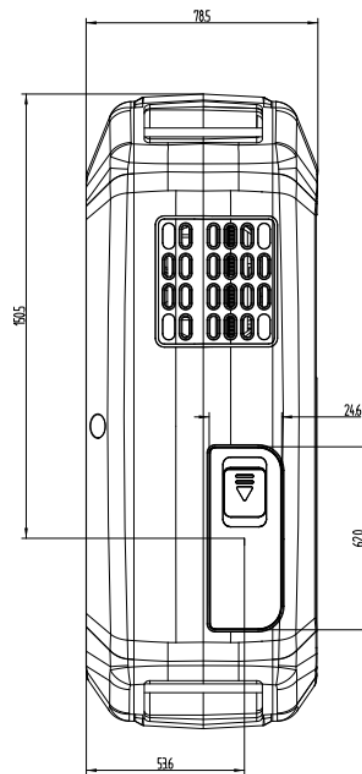

Side view Left (battery on the left side of the screen)

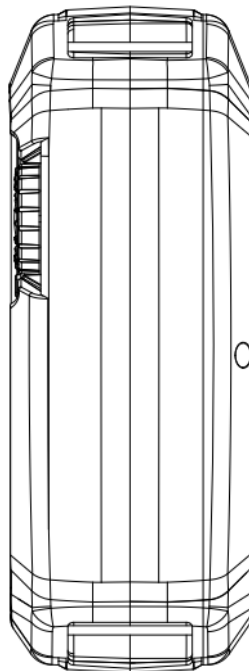

Side view Right

## Ordering Information

| Items                                                              | Description                                                                             | Order number      |
|--------------------------------------------------------------------|-----------------------------------------------------------------------------------------|-------------------|
| Products                                                           | 2 ports, 14 G Vector Network Analyzer                                                   | SHN914A           |
|                                                                    | 2 ports, 20 G Vector Network Analyzer                                                   | SHN920A           |
|                                                                    | 2 ports, 26.5 G Vector Network Analyzer                                                 | SHN926A           |
| standard fittings                                                  | Quick Start, USB Type C Line, Rechargeable lithium battery, AC-DC adapter, Portable bag |                   |
| TDA Option                                                         | Time Domain Analysis                                                                    | SHN900-TDA        |
| TDR Option                                                         | Enhanced Time Domain Analysis                                                           | SHN900-TDR        |
| SA Option                                                          | Spectrum analysis                                                                       | SHN900-SA         |
| AFR Option                                                         | Automatic Fixture Removal Software                                                      | SHN900-AFR        |
| 3.5 mm, Male, 50 $\Omega$ Calibration Kit, 0 - 4.5 GHz             |                                                                                         | F603ME            |
| 3.5 mm, Female, 50 $\Omega$ Calibration Kit, 0 - 4.5 GHz           |                                                                                         | F603FE            |
| 3.5 mm, Male, 50 $\Omega$ Calibration Kit, 0 – 9 GHz               |                                                                                         | F604MS            |
| 3.5 mm, Female, 50 $\Omega$ Calibration Kit, 0 – 9 GHz             |                                                                                         | F604FS            |
| 3.5 mm, Male and Female, 50 $\Omega$ Calibration Kit, 0 – 9 GHz    |                                                                                         | F604TS            |
| 3.5 mm, Male and Female, 50 $\Omega$ Calibration Kit, 0 - 26.5 GHz |                                                                                         | F606TS            |
| Electronic Calibration Kit                                         |                                                                                         | SEM5000A          |
| RF Test Demo Board                                                 |                                                                                         | SNA-TB01          |
| Adjustable Differential TDR probe DC - 18 GHz                      |                                                                                         | ADP-18            |
| Adjustable Differential TDR probe DC - 26.5 GHz                    |                                                                                         | ADP-26            |
| Adjustable Differential TDR probe DC - 18 GHz                      |                                                                                         | ASP-18            |
| Adjustable Differential TDR probe DC - 26.5 GHz                    |                                                                                         | ASP-26            |
| SMA(M)-SMA(M) cable DC - 18 GHz, 1000 mm                           |                                                                                         | SMA-SMA-18L       |
| SMA(M)-SMA(M) cable DC - 26.5 GHz, 1000 mm                         |                                                                                         | SMA-SMA-26L       |
| SMA(F)-SMA(M) cable DC - 26.5 GHz, 1000 mm                         |                                                                                         | SMAF-SMA-26L      |
| NMD 3.5 female-NMD 3.5 Male DC - 26.5 GHz, 635 mm                  |                                                                                         | V26-N35MN35F-25IN |
| NMD 3.5 female-APC 3.5 female DC - 26.5 GHz, 635 mm                |                                                                                         | V26-N35FA35F-25IN |
| USB-GPIB Adaptor                                                   |                                                                                         | USB-GPIB          |
| GPS antenna, SMA(M), 1000 mm                                       |                                                                                         | ANT-GPS1          |



## About SIGLENT

SIGLENT is an international high-tech company, concentrating on R&D, sales, production and services of electronic test & measurement instruments.

SIGLENT first began developing digital oscilloscopes independently in 2002. After more than a decade of continuous development, SIGLENT has extended its product line to include digital oscilloscopes, isolated handheld oscilloscopes, function/arbitrary waveform generators, RF/MW signal generators, spectrum analyzers, vector network analyzers, digital multimeters, DC power supplies, electronic loads and other general purpose test instrumentation. Since its first oscilloscope was launched in 2005, SIGLENT has become the fastest growing manufacturer of digital oscilloscopes. We firmly believe that today SIGLENT is the best value in electronic test & measurement.

### Headquarters:

SIGLENT Technologies Co., Ltd  
Add: Bldg No.4 & No.5, Antongda Industrial Zone,  
3rd Liuxian Road, Bao'an District,  
Shenzhen, 518101, China  
Tel: + 86 755 3688 7876  
Fax: + 86 755 3359 1582  
Email: sales@siglent.com  
Website: int.siglent.com

### North America:

SIGLENT Technologies NA, Inc  
Add: 6557 Cochran Rd Solon, Ohio 44139  
Tel: 440-398-5800  
Toll Free: 877-515-5551  
Fax: 440-399-1211  
Email: support@siglentna.com  
Website: www.siglentna.com

### Europe:

SIGLENT Technologies Germany GmbH  
Add: Staetzlinger Str. 70  
86165 Augsburg, Germany  
Tel: +49(0)-821-666 0 111 0  
Fax: +49(0)-821-666 0 111 22  
Email: info-eu@siglent.com  
Website: www.siglenteu.com

### Malaysia:

SIGLENT Technologies (M) Sdn.Bhd  
Add: NO.6 Lorong Jelawat 4  
Kawasan Perusahaan Seberang Jaya  
13700, Perai Pulau Pinang

Follow us on  
Facebook: SiglentTech

